


WAAS CH 77521 W22A	APP CRS 223°	Rwy Idg 6601 TDZE 259 Apt Elev 277
--	------------------------	---


RNAV (GPS) RWY 22

SOUTH ARKANSAS RGNL AT GOODWIN FLD (ELD)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV all Cats visibility to 1½ SM, increase LNAV/VNAV all Cats visibility to 1¼ SM. Circling Rwy 4, 13, 31, NA at night.	MALSR 	MISSED APPROACH: Climb to 2000 direct ZUSUK and hold.
---	-----------	--

ASOS 118.325	FORT WORTH CENTER 128.2 269.1	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

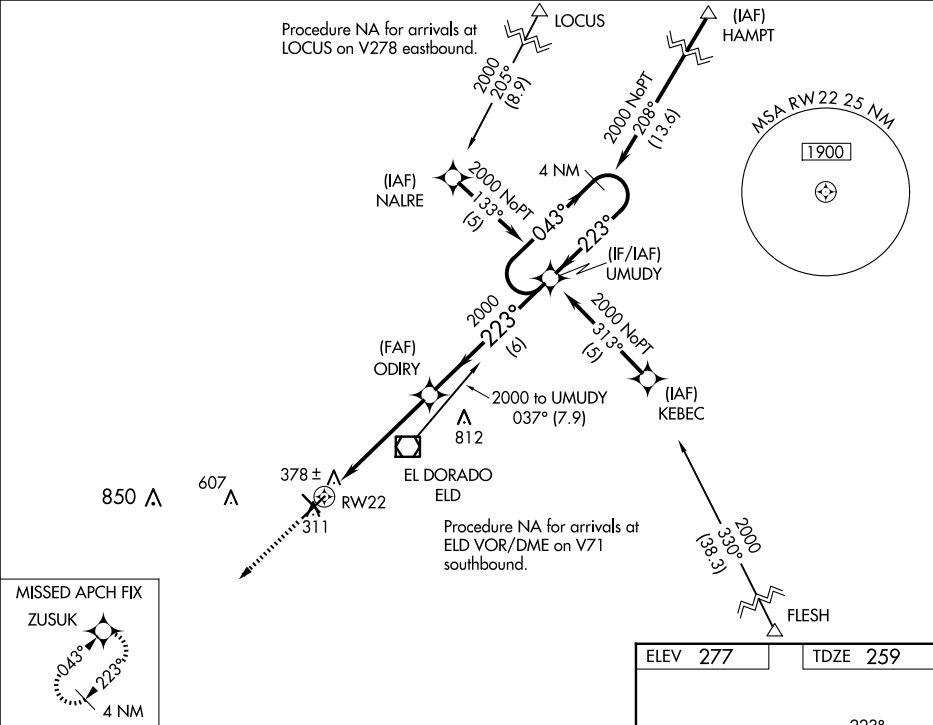

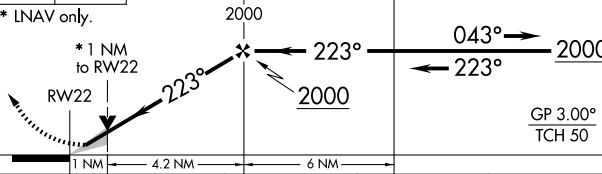2000	ZUSUK	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 53).		4 NM Holding Pattern
				
* LNAV only.				
				
CATEGORY	A	B	C	D
LPV DA	602-5/8 343 (400-5%)			
LNAV/ VNAV DA	650-7/8 391 (400-5%)			
LNAV MDA	640-1/2 381 (400-1/2)		640-5/8 381 (400-5%)	
CIRCLING	740-1 463 (500-1)		920-13/4 643 (700-13/4)	920-2 643 (700-2)

