


LOC I-SRQ 109.7	APP CRS 319°	Rwy Ldg TDZE Apt Elev 7510 27 30
---------------------------	------------------------	--


ILS or LOC RWY 32
SARASOTA/BRADENTON INTL (SRQ)

DME or RADAR required.	MALSR 	MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 on heading 065° and SRQ VOR/DME R-030 to PAIRS INT/PIE VORTAC 23 DME and hold, continue climb-in-hold to 3000.
Autopilot coupled approach NA below 840. When control tower closed, S-ILS 32 Minimums NA, increase S-LOC 32 and ZALDI Fix Minimums S-LOC 32 all Cats visibility to 1. When control tower closed, inop table does not apply to S-LOC 32 and ZALDI Fix Minimums all Cats.		

ATIS 124.375	TAMPA APP CON 119.65 353.575	SARASOTA TOWER★ 120.1(CTAF) 256.8	GND CON 121.9 273.6	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

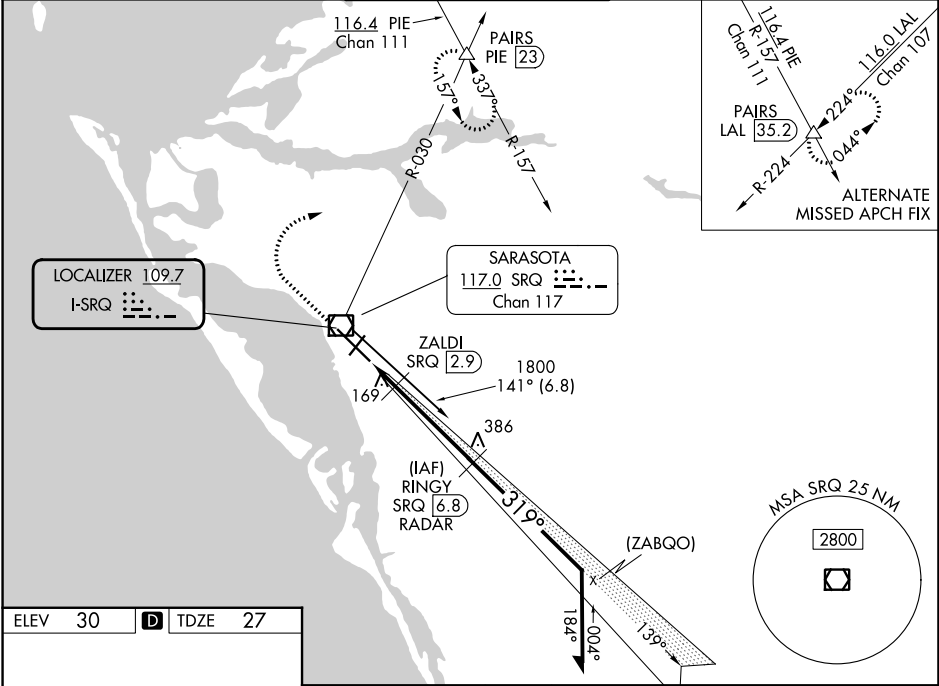

ELEV 30	D	TDZE 27
---------	---	---------

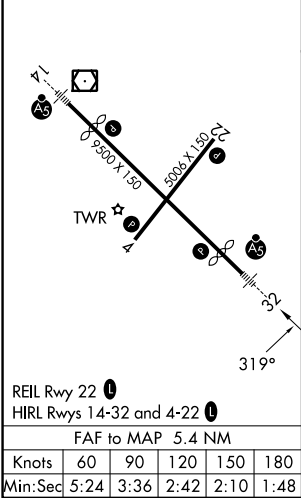

1000	3000	SRQ R-030	PAIRS	RINGY SRQ 6.8 RADAR	Remain within 10 NM
*LOC only.					
ZALDI SRQ 2.9					
1800 139° 319° 1800					
480* 1800					
1.5 NM 3.9 NM					
CATEGORY	A	B	C	D	
S-ILS 32	227-½ 200 (200-½)				
S-LOC 32	480-½	453 (500-½)	480-¾	453 (500-¾)	
CIRCLING	500-1	470 (500-1)	600-1½	600-2	
ZALDI FIX MINIMUMS					
S-LOC 32	360-½ 333 (400-½)				
CIRCLING	500-1	470 (500-1)	600-1½	600-2	