

LOC I-MOD 111.9	APP CRS 288°	Rwy Ldg 5904 TDZE 91 Apt Elev 99
---------------------------	------------------------	--

ILS or LOC RWY 28R

MODESTO CITY-COUNTY-HARRY SHAM FLD (MOD)



DME required for LOC only.

Autopilot coupled approach NA below 1080. Circling Rwy 10R, 28L NA at night. DME from MOD VOR/DME. DME use requires simultaneous reception of I-MOD and MOD DME. For inop ALS, increase S-LOC 28R Cats C and D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct MOD VOR/DME and hold, continue climb-in-hold to 2000.

ATIS 127.7	NORCAL APP CON 120.95 269.45	MODESTO TOWER* 125.3 (CTAF) 0 257.8	GND CON 121.7	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

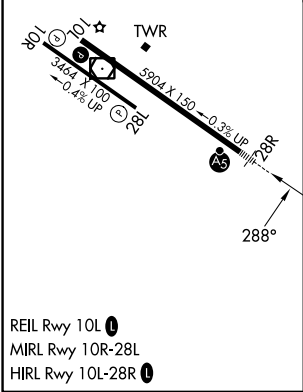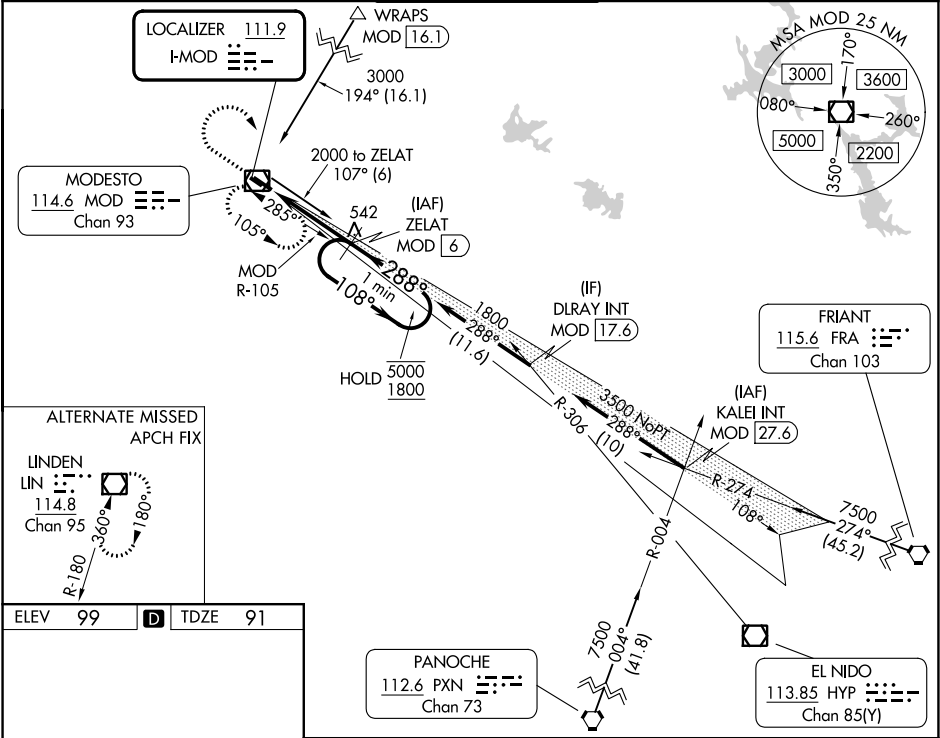

1500	2000	MOD	ZELAT MOD 6				One Minute Holding Pattern	
							1800	
			MOD 0.8		MOD 2.2		108° → 5000	
							← 288° 1800	
							GS 3.00° TCH 53	
			1.4 NM		3.8 NM			
CATEGORY	A		B		C		D	
S-ILS 28R	341-½ 250 (300-½)							
S-LOC 28R	580-½		489 (500-½)		580-1		489 (500-1)	
CIRCLING	580-1 481 (500-1)		600-1 501 (600-1)		640-1½ 541 (600-½)		820-2¼ 721 (800-2¼)	