
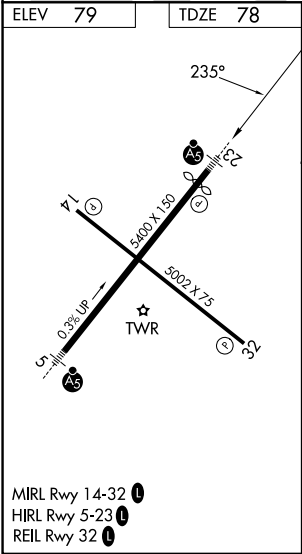


WAAS CH 65638 W23A	APP CRS 235°	Rwy Ldg TDZE 78 Apt Elev 79	5000
--	------------------------	---	-------------

RNAV (GPS) RWY 23

NEW BEDFORD RGNL (E W B)

RNP APCH - GPS.				MALSR	MISSED APPROACH: Climb to 2100 direct BONNI and hold.
T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 23 helicopter visibility reduction below ¾ SM NA. Circling Rwy 14 NA at night. For inop ALS, increase LPV all Cats visibility to ¾ mile, increase LNAV/VNAV all Cats and LNAV Cats A/B visibility to 1 SM.					
ATIS 126.85	PROVIDENCE APP CON★ 128.7 269.525	NEW BEDFORD TOWER★ 118.1 (CTAF) 0 239.0	GND CON 121.9	UNICOM 122.95	

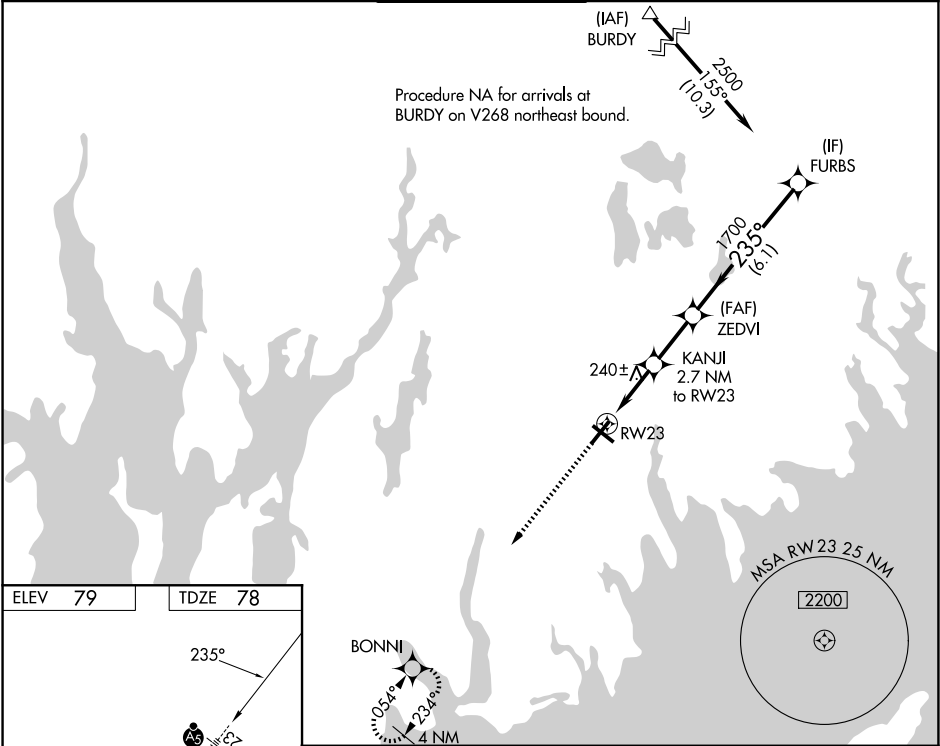

2100 ↑		BONNI ✧		KANJI 2.7 NM to RW23		ZEDVI 1700		FURBS 2500	
		1.2 NM to RW23		980		1700		235°	
		RW23		GP 3.00° TCH 46					
		1.2		1.5 NM		2.3 NM		6.1 NM	
CATEGORY		A		B		C		D	
LPV DA				359-¾ 281 (300-¾)					
LNAV/ VNAV DA				453-¾ 375 (400-¾)					
LNAV MDA				500-¾ 422 (500-¾)					
CIRCLING		620-1 541 (600-1)		640-1 561 (600-1)		720-1¾ 641 (700-1¾)		960-3 881 (900-3)	