

WAAS CH 86727 W21A	APP CRS 210°	Rwy Ldg TDZE Apt Elev	6780 857 859
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21

MID-OHIO VALLEY RGNL (PKB)


RNP APCH.

▼

Baro-VNAV and VDP NA when using Athens/Albany altimeter setting. Rwy 21 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 38°C. When local altimeter setting not received, use Athens/Albany altimeter setting: increase LPV DA to 1249 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1237 feet and visibility all Cats ½ SM; increase all MDAs 100 feet and visibility Cat C/D ½ SM. Circling Rwy 10, 28 NA at night.

MISSED APPROACH:
Climb to 3000 direct
UNSAW and hold.

ATIS 124.35	INDIANAPOLIS CENTER 125.55 317.475	PARKERSBURG TOWER ★ 123.7 (CTAF) 0 257.8	GND CON 126.45	UNICOM 122.95
-----------------------	--	--	--------------------------	-------------------------

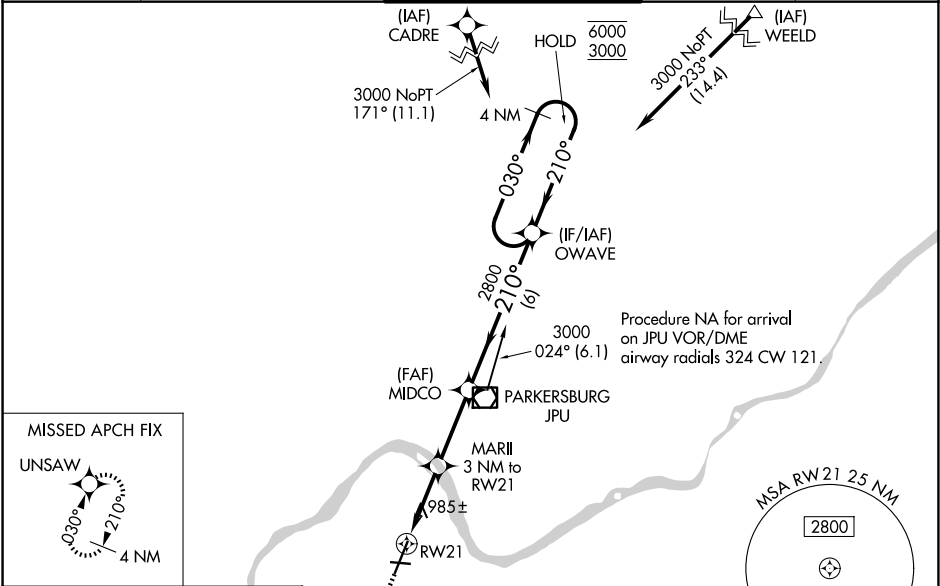

ELEV 859 **D** TDZE 857

REIL Rwy 28
REIL Rwy 10, 21
HIRL Rws 3-21 and 10-28

3000	UNSAW	MARII 3 NM to RW21	MIDCO 2800	OWAVE	4 NM Holding Pattern	GP 3.00° TCH 56
*LNAV only.	*1 NM to RW21	*1860	2800	210°	030° → 6000 ← 210° 3000	
1 NM	2 NM	2.9 NM	6 NM			
CATEGORY	A	B	C	D		
LPV DA		1149-¾	292 (300-¾)			
LNAV/VNAV DA		1137-¾	280 (300-¾)			
LNAV MDA	1240-1	383 (400-1)	1240-1½	383 (400-1½)		
CIRCLING	1320-1 461 (500-1)	1380-1 521 (600-1)	1640-2¼ 781 (800-2¼)	1640-2½ 781 (800-2½)		