

APP CRS	Rwy Ldg	10000
186°	TDZE	889
	Apt Elev	896

RNAV (RNP) Z RWY 18L

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)



RNP AR APCH - GPS. Authorization required. From NABRS or OCONO: RF.

For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C.
For inop ALS, increase RNP 0.25 all Cats visibility to 5500 and increase RNP 0.30 all
Cats visibility to 1½ SM. Simultaneous approach authorized.

MALSR

MISSED APPROACH: Climb
to 3000 direct LAPR and on
track 136° to FLM VOR/DME
and hold.

D-ATIS	CINCINNATI APP CON	CINCINNATI TOWER	GND CON
134.375	119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)	121.7

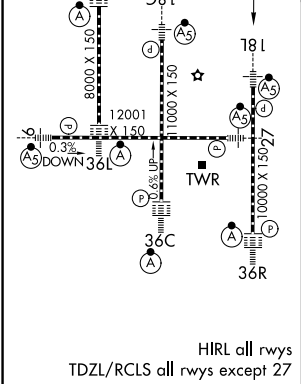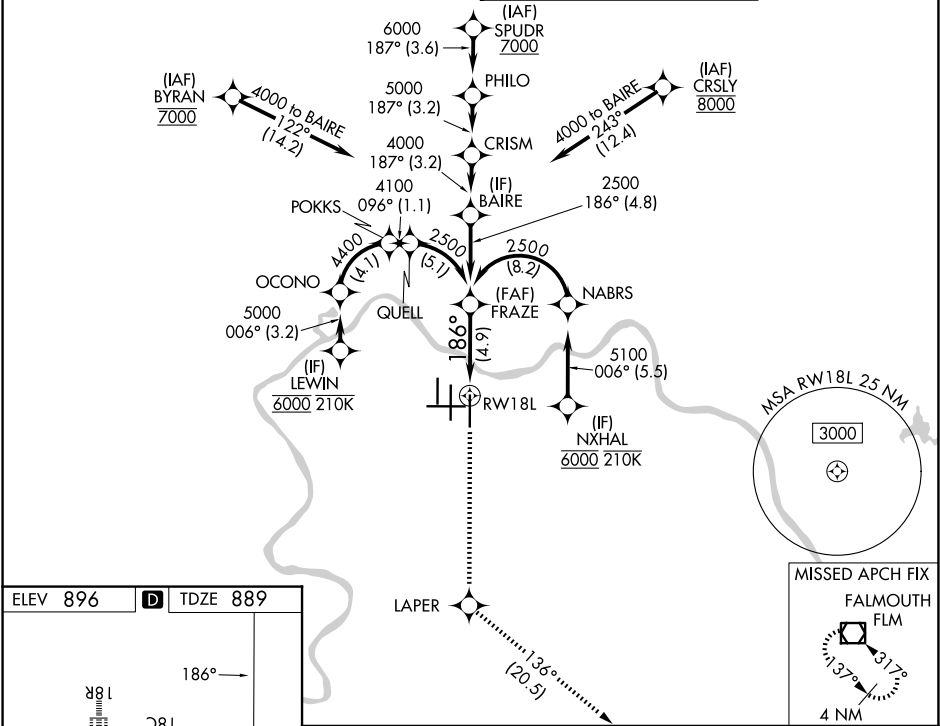

3000

LAPR

tr 136°

FLM

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00°/TCH 71).

See planview for multiple IF locations.

RW18L

FRAZE

2500

2500

186°

4.9 NM

GP 3.00°
TCH 55

CATEGORY	A	B	C	D
RNP 0.25 DA		1240/30	351 (400-5%)	
RNP 0.30 DA		1388/50	499 (500-1)	

AUTHORIZATION REQUIRED

SE-1, 01 OCT 2026 to 29 OCT 2026

SE-1, 01 OCT 2026 to 29 OCT 2026