

WAAS CH 53631 W22A	APP CRS 218°	Rwy Ldg 6145 TDZE 68 Apt Elev 75
--	------------------------	---

RNAV (GPS) RWY 22
ATLANTIC CITY INTL (ACY)

RNP APCH - GPS.	
-----------------	--

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). Rwy 22 helicopter visibility reduction below $\frac{3}{4}$ SM NA.



MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct TUBER and hold.

ATIS	ATLANTIC CITY APP CON	ATLANTIC CITY TOWER	GND CON
125.725 316.15	124.6 327.125	120.3 239.0	121.9 284.6


RADAR REQUIRED
WHEN R-5002B
IS ACTIVE.

CEDAR LAKE VCN 

Procedure NA for arrival on VCN VORTAC
airway radials 066 CW 160.

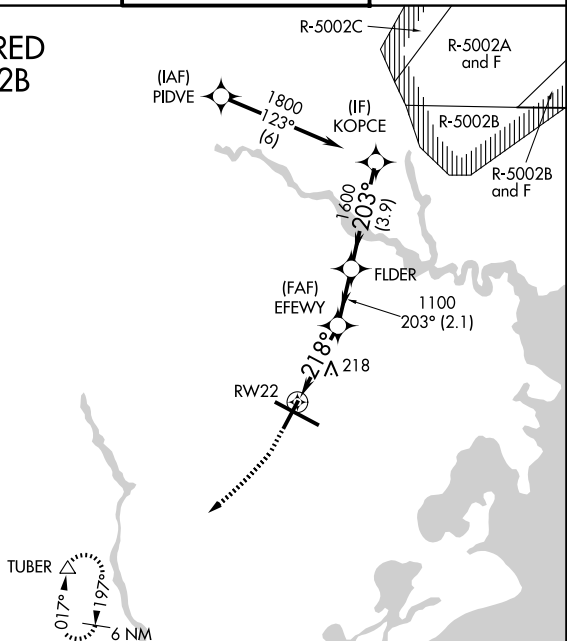


ELEV 75	D	TDZE 68
---------	----------	---------



TDZL/RCLS Rwy 13
HIRL Rwys 4-22 and 13-31
REIL Rwy 31

ATLANTIC CITY, NEW JERSEY
Amdt 4D 09JUL26

39°27'N-74°35'W

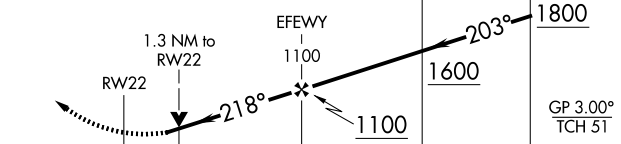															
															
CATEGORY		A		B		C		D		E					
LPV DA		364-1 296 (300-1)													
LNAV/VNAV DA		356-7/8 288 (300-7/8)													
LNAV MDA		520-1 452 (500-1)				520-1 3/8 452 (500-1 3/8)									
CIRCLING		540-1 465 (500-1)		600-1 525 (600-1)		620-1 1/2 545 (600-1 1/2)		640-2 565 (600-2)		760-2 1/2 685 (700-2 1/2)					

ATLANTIC CITY INTL (ACY)
RNAV (GPS) RWY 22