

WAAS CH 97505 W04A	APP CRS 041°	Rwy Ldg TDZE 1496 Apt Elev 1500
--	------------------------	---


RNAV (GPS) RWY 4

JAMESTOWN RGNL (JMS)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3300 direct CALOT and hold.

ASOS 118.425	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

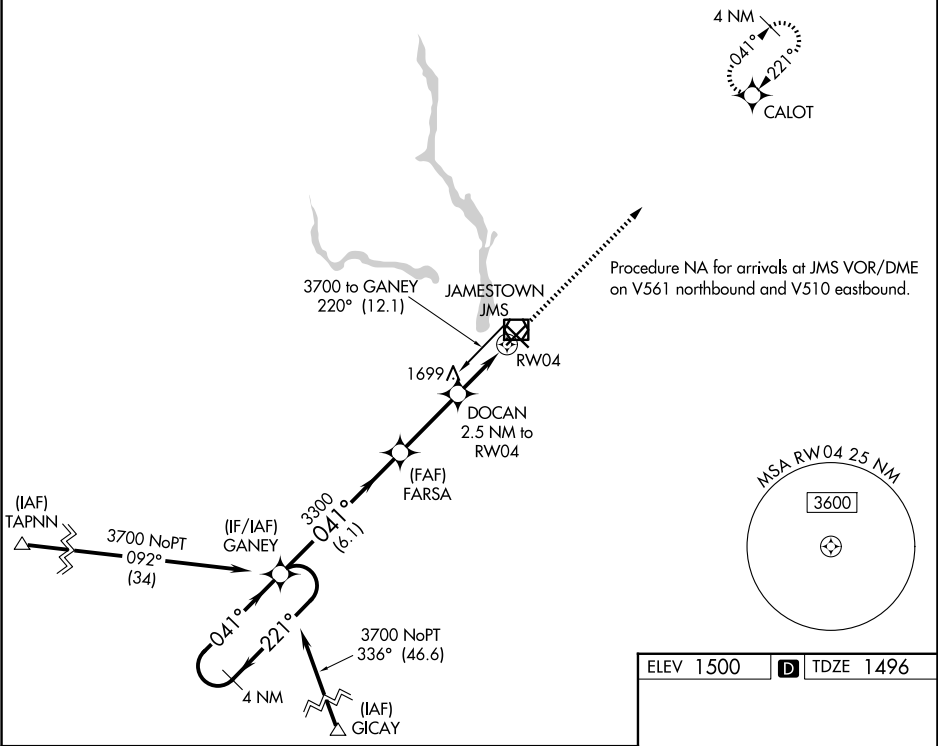

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 22).		3300	CALOT
3700		3300		*LNAV only	
GP 3.00° TCH 45		*2340		RW04	
6.1 NM		2.9 NM		1 NM	
CATEGORY	A	B	C	D	
LPV DA	1746-1		250 (300-1)		
LNAV/ VNAV DA	1930-1½		434 (500-1½)		
LNAV MDA	2000-1 504 (500-1)		2000-1½		504 (500-1½)
CIRCLING	2000-1 500 (500-1)		2000-1½ 500 (500-1½)		2300-2½ 800 (800-2½)

ELEV 1500 **D** TDZE 1496

MIRL Rwy 4-22 0

HIRL Rwy 13-31 0

REIL Rwy 4, 13, and 22 0