


|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Ldg  | 7614 |
| 306°    | TDZE     | 57   |
|         | Apt Elev | 62   |

RNAV (RNP) Z RWY 30L


MINETA SAN JOSE INTL (SJC)

|                                                                                                                                                                                                  |       |                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------------------------------------------------------------|
| RNP AR APCH.                                                                                                                                                                                     | MALSR | MISSED APPROACH: Climb to 2000 on track 306° to ARTAQ and hold. |
| ▼ For uncompensated Baro-VNAV systems, procedure NA below 1°C or above 54°C. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 5500 and increase RNP 0.30 all Cats visibility to 1½ SM. | AS    |                                                                 |

|                  |                                |                                         |                  |                  |
|------------------|--------------------------------|-----------------------------------------|------------------|------------------|
| D-ATIS<br>126.95 | NORCAL APP CON<br>120.1 290.25 | SAN JOSE TOWER★<br>124.0 (CTAF) 0 257.6 | GND CON<br>121.7 | UNICOM<br>122.95 |
|------------------|--------------------------------|-----------------------------------------|------------------|------------------|

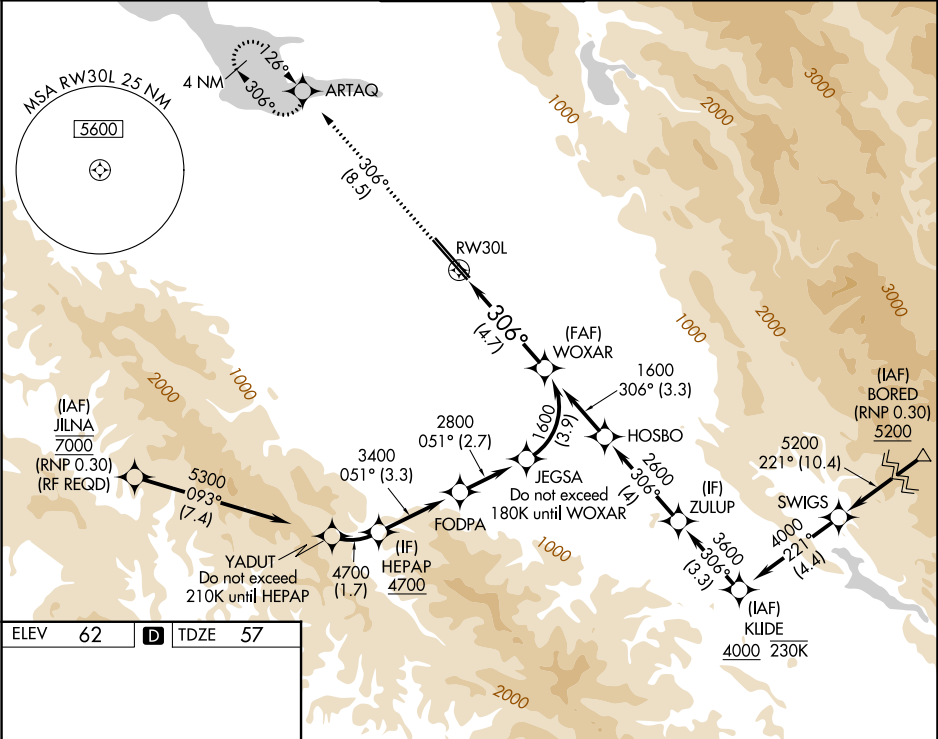

|         |   |         |
|---------|---|---------|
| ELEV 62 | D | TDZE 57 |
|---------|---|---------|

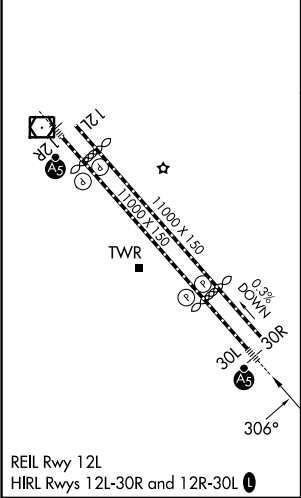

2000

↑

tr 306°

ARTAQ

VGSI and RNAV glidepath not coincident  
(VGSI Angle 3.00/TCH 70).

WOXAR

1600

See planview for multiple IF locations.

RW30L

306°

4.7 NM

GP 3.00°

TCH 54

1600

| CATEGORY    | A                  | B | C | D |
|-------------|--------------------|---|---|---|
| RNP 0.10 DA | 430/35 373 (400-½) |   |   |   |
| RNP 0.20 DA | 464/40 407 (500-¾) |   |   |   |
| RNP 0.30 DA | 541/50 484 (500-1) |   |   |   |

AUTHORIZATION REQUIRED