
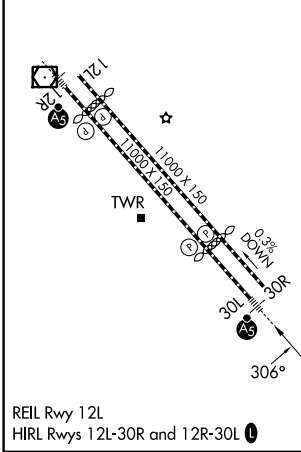


WAAS CH 97306 W30A	APP CRS 306°	Rwy Ldg 30L 7614 30R 7597 TDZE 57 Apt Elev 62	30R 55 62
--	------------------------	---	-------------------------------

RNAV (GPS) Y RWY 30L
MINETA SAN JOSE INTL (SJC)

RNP APCH-GPS.			MALS Rwy 30L 	MISSED APPROACH: Climb to 2300 direct MUSSK and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM. * RVR 1800 authorized with use of FD or AP or HUD to DA.				
D-ATIS 126.95	NORCAL APP CON 120.1 290.25	SAN JOSE TOWER★ 124.0 (CTAF) 0 257.6	GND CON 121.7	UNICOM 122.95

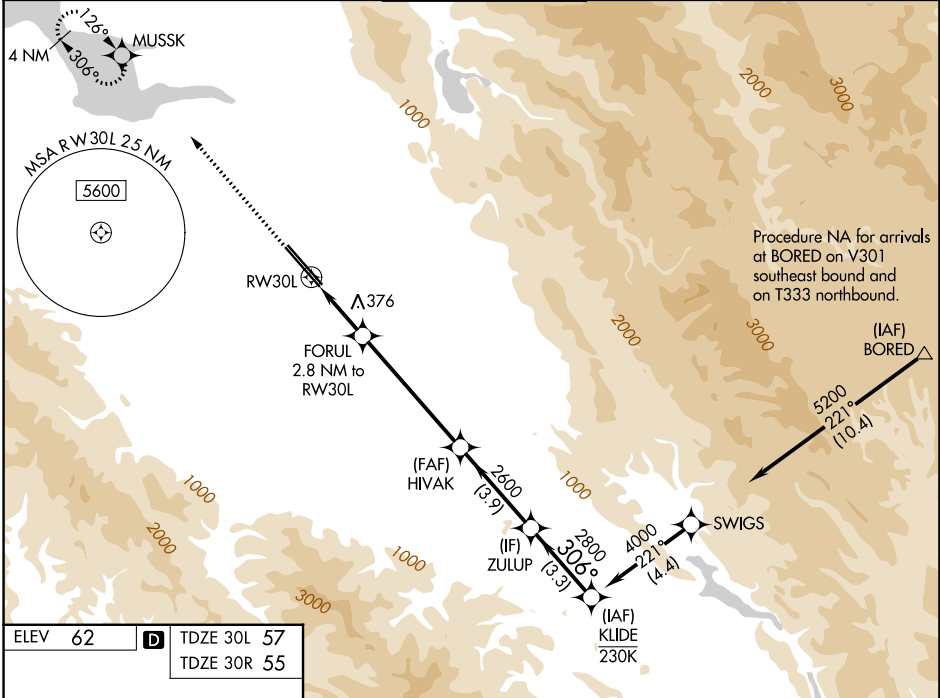

2300 MUSSK		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 70).			
FORUL 2.8 NM to RWY 30L		HIVAK 2600		ZULUP	
1.6 NM to RWY 30L		2600		306° 4000	
1000		2600		GP 3.00° TCH 54	
1.6 NM		1.2 NM		5.3 NM	
3.9 NM		3.3 NM			
CATEGORY	A	B	C	D	
LPV	DA*	257/24	200 (200-½)		
LNAV/VNAV	DA	540/50	483 (500-1)		
LNAV	MDA	640/24	583 (600-½)	640-1¼	583 (600-1¼)
SIDESTEP	30R	640-1	585 (600-1)		

SW-2, 01 OCT 2026 to 29 OCT 2026

SW-2, 01 OCT 2026 to 29 OCT 2026