


ILS or LOC RWY 24

- T** VDP NA with Hyannis altimeter setting. When local altimeter setting not received, use Hyannis altimeter setting and increase all DA to 317 feet and all MDA 60 feet; increase S-LOC Cats C and D visibility to RVR 5000, Circling Cat C and D visibility ¼ SM. For inoperative MALSR when using Hyannis altimeter setting, increase S-LOC Cats C and D visibility to 1½ mile. Circling Rwy 15 NA at night. **RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Hyannis altimeter setting).


MALSR

MISSED APPROACH:
Climb to 800 then
climbing left turn to 2500
on MVY VOR/DME R-180
to CLAMY INT/ACK 23.9
DME and hold.

ATIS 126.25	BOSTON APP CON 133.75	VINEYARD TOWER ★ 121.4 (CTAF) 0	GND CON 124.35	UNICOM 122.95
----------------	--------------------------	------------------------------------	-------------------	------------------

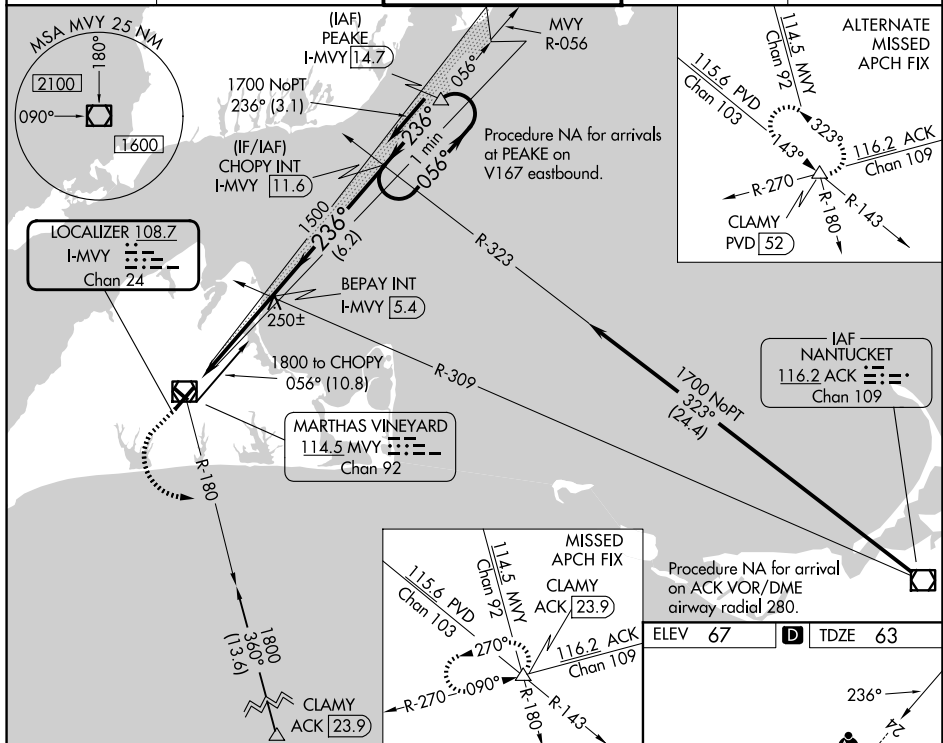

		CLAMY 		Use I-MVY DME when on the localizer course.	
*LOC only		*I-MVY 		One Minute Holding Pattern	
		1500		1700	
1.2 NM		3.2 NM		6.2 NM	
CATEGORY	A		B	C	D
S-ILS 24 **	263/24 200 (200-½)				
S-LOC 24	500/24		437 (500-½)	500/40	437 (500-¾)
CIRCLING	500-1 433 (500-1)		540-1 473 (500-1)	700-1¾ 633 (700-1¾)	780-2¼ 713 (800-2¼)

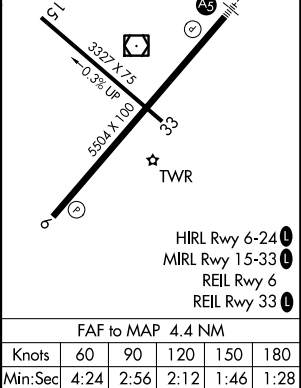

NE-1, 01 OCT 2026 to 29 OCT 2026