

WAAS CH 48804 W24A	APP CRS 236°	Rwy Ldg 5504 TDZE 63 Apt Elev 67
--	------------------------	---

RNAV (GPS) RWY 24
MARTHA'S VINEYARD (MVY)


T For uncompensated Baro-VNAV systems, INAV/VNAV NA below -14°C (7°F) or above 54°C (130°F), DA/DME RNP-0.3 NA when local altimeter setting not received, VNAV Hyannis altimeter setting and increase all DA 54 feet and all MDA 60 feet; increase INAV/VNAV all Cats visibility to RVR 5200; increase INAV Cts C/D visibility to RVR 5000; increase Circling visibility Cts C to 2 miles and D to 2 1/2 mile. For inop MALSR, increase INAV/VNAV all Cts visibility to 1% mile. For inop MALSR using Hyannis altimeter setting, increase LPV all Cts visibility to RVR 4000, INAV/VNAV all Cts visibility to 1% mile and increase INAV Cts C/D visibility to 1% mile. VDP and Baro-VNAV NA when using Hyannis altimeter setting. Night landing: Rwy 15 NA. ** RVR 1800 authorized with use of FD or AP or HUD to DA, when using Hyannis altimeter setting.

MALSR



MISSED APPROACH:
Climb to 500 then
climbing left turn to
2500 direct CLAMY
and hold.

ATIS 126.25	BOSTON APP CON 133.75	VINEYARD TOWER ★ 121.4 (CTAF) 0	GND CON 124.35	UNICOM 122.95
-----------------------	---------------------------------	---	--------------------------	-------------------------

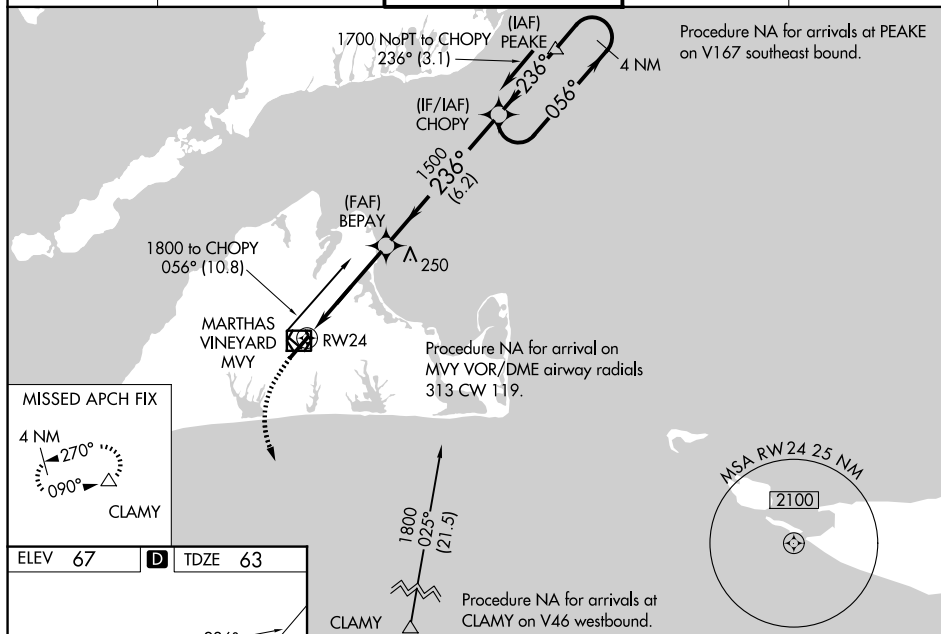

HIRL Rwy 6-24 **L**
 MIRL Rwy 15-33 **L**
 REIL Rwy 6
 REIL Rwy 33 **L**

500 ↑	2500 ↖	CLAMY △				
*LNAV only	*1.2 NM to RW24					
CATEGORY	A	B	C	D		
LPV DA	** 263/24		200 (200-½)			
LNAV/VNAV DA	480/47		417 (500-1)			
LNAV MDA	500/24	437 (500-½)	500/40	437 (500-¾)		
CIRCLING	500-1 433 (500-1)	540-1 473 (500-1)	700-1¾ 633 (700-1¾)	780-2¼ 713 (800-2¼)		