


WAAS CH 86918 W09A	APP CRS 087°	Rwy Ldg TDZE Apt Elev	4000 967 979
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 9
BLUE GRASS (LEX)

RNP APCH - GPS.	Baro-VNAV and VDP NA when using FFT altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use FFT altimeter setting: increase LPV DA to 1279 feet; increase LNAV/VNAV DA to 1421 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ½ SM, and Circling visibility Cats C/D ¼ SM.	MISSED APPROACH: Climb to 3000 direct REBAA and hold.
-----------------	---	---

ATIS 126.3	LEXINGTON APP CON 120.15 259.3 (040°-220°) 120.75 298.9 (221°-039°)	LEXINGTON TOWER 119.1 257.8	GND CON 121.9
----------------------	---	---------------------------------------	-------------------------

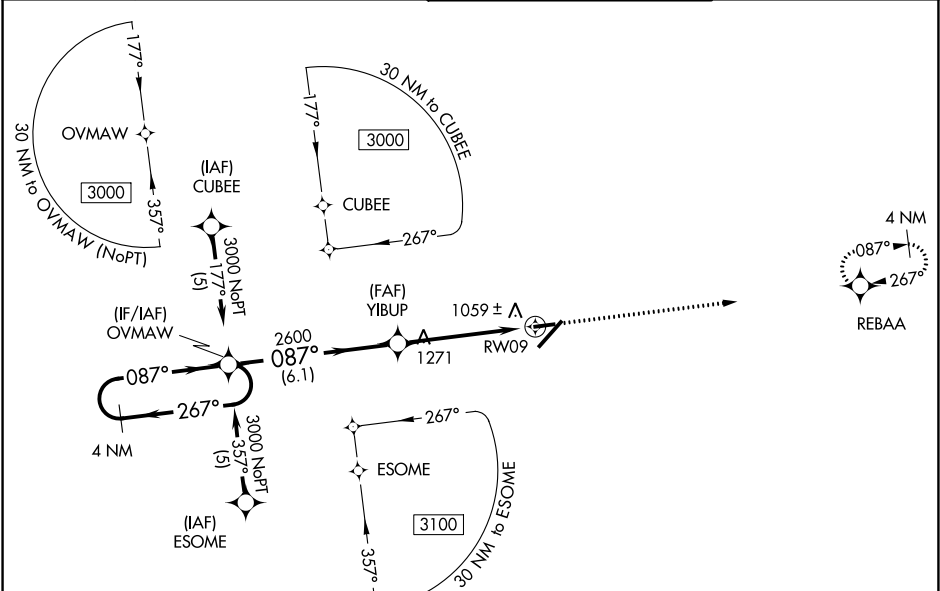

4 NM Holding Pattern		OMAW		YIBUP		ESONE		REBAA	
3000		2600		2600		3000		3000	
GP 3.00°		TCH 43		1.7 NM to RWY 9		RWY 9		RWY 9	
6.1 NM		3.3 NM		1.7 NM		1.7 NM		1.7 NM	
CATEGORY	A	B	C	D					
LPV DA	1217-1				250 (300-1)				
LNAV/VNAV DA	1359-1½				392 (400-1½)				
LNAV MDA	1540-1	573 (600-1)	1540-1½	573 (600-1½)	1540-1¾	573 (600-1¾)			
CIRCLING	1540-1	561 (600-1)	1540-1½	561 (600-1½)	1600-2	621 (700-2)			