

WAAS CH 93738 W24A	APP CRS 240°	Rwy Ldg TDZE 682 Apt Elev 682
--	------------------------	---

RNAV (GPS) RWY 24

DECATUR (DEC)

RNP APCH.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.

▲


Baro-VNAV and VDP NA when using Logan County altimeter setting.

▲

When local altimeter setting not received, use Logan County altimeter setting; increase LPV DA to 1012 feet and visibility all Cats ¼ mile, LNAV/VNAV DA to 1168 feet and visibility all Cats ¼ mile; increase all MDA 80 feet and LNAV visibility Cts C/D ¾ mile, Circling visibility Cats C/D ¼ mile.

MISSED APPROACH:
Climb to 2300 direct
FIKDO and hold.

ATIS 126.35	CHAMPAIGN APP CON* 132.85 290.225	DECATUR TOWER* 118.9 (CTAF) 291.775	GND CON 121.75 291.775	UNICOM 122.95
-----------------------	---	---	----------------------------------	-------------------------

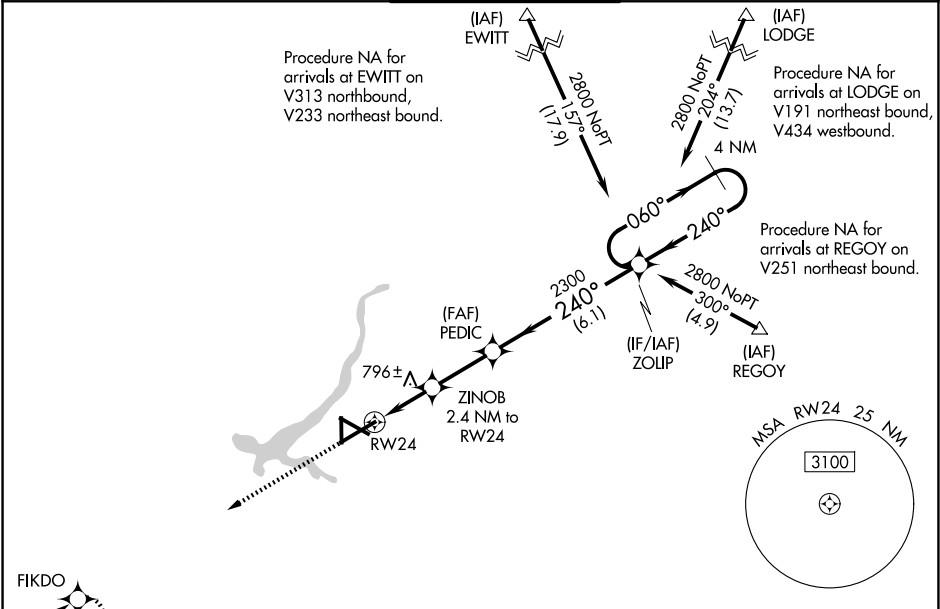

ELEV 682		D		TDZE 682	
2300 FIKDO					
*LNAV only.		GP 3.00° TCH 52			
RW24		ZINOB 2.4 NM to RW24			
*1 NM to RW24		PEDIC 2300			
*1500		ZOLIP			
1 NM		1.4 NM		2.5 NM	
1 NM		1.4 NM		6.1 NM	
CATEGORY	A	B	C	D	
LPV DA	932-3/4 250 (300-3/4)				
LNAV/VNAV DA	1088-13/8 406 (500-13/8)				
LNAV MDA	1060-1 378 (400-1)				
CIRCLING	1140-1 458 (500-1)	1240-1 558 (600-1)	1360-2 678 (700-2)	1360-2 1/4 678 (700-2 1/4)	

81

12

6799 X 150

5298 X 150

8496 X 150

36

30

7

240°

TWR

AS

☆

HIRL Rwy 6-24
MIRL Rws 12-30 and 18-36