

LOC I-AZO <u>110.9</u>	APP CRS 354°	Rwy Ldg 6502 TDZE 868 Apt Elev 874
----------------------------------	------------------------	---

ILS or LOC RWY 35
KALAMAZOO/BATTLE CREEK INTL (AZO)



ADF required. DME required for LOC only. RADAR required for procedure entry.

NA DME from AZO DME. DME use requires simultaneous reception of I-AZO and AZO DME. Circling Rwy 5, 9, 23, 27 NA at night. When local altimeter setting not received, use BTL altimeter setting: increase S-ILS 35 DA to 1112 feet; increase all MDAs 60 feet and visibility S-LOC 35 Cats C/D to RVR 4500 and Circling visibility Cats C/D ¼ SM. * RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Battle Creek altimeter setting).


MALSR

MISSED APPROACH:
Climb to 2000 then climbing
left turn to 2800 direct
AUSTN LOM/AZO 6.4 DME
and hold.

ATIS 127.25	GREAT LAKES APP CON ★ 121.2 239.25	KALAMAZOO TOWER ★ 118.3 (CTAF) 0 257.875	GND CON 121.9	UNICOM 122.95
----------------	---------------------------------------	---	------------------	------------------

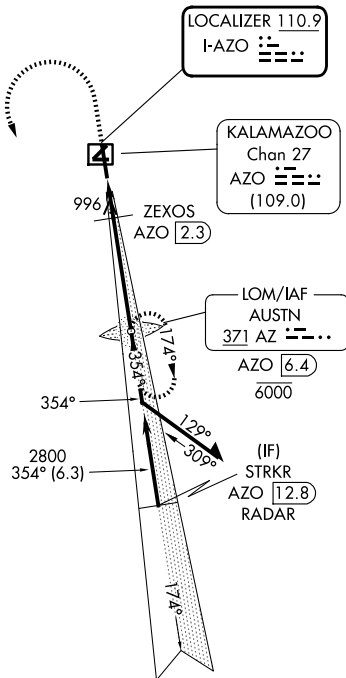

ELEV 874	D	TDZE 868
----------	----------	----------



HIRL Rwy 17-35 **L**
REIL Rwys 5, 17 and 23 **L**
MIRL Rwys 5-23 and 9-27 **L**

