

WAAS CH 82200 W18A	APP CRS 185°	Rwy Ldg TDZE Apt Elev 592
--	------------------------	--

RNAV (GPS) RWY 18


PRYOR FLD RGNL (DCU)

⚠

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huntsville Intl-Carl T Jones Fld altimeter setting: increase LPV DA to 817 and LNAV/VNAV DA to 920 and all visibilities ½ mile. Increase all MDA 40 feet and LNAV Cat C and D visibility ⅓ mile. VDP and Baro-VNAV NA when using Huntsville Intl-Carl T Jones Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F).

MISSED APPROACH:
Climb to 3000 direct
ATHEN and hold.

ASOS 118.375	HUNTSVILLE APP CON* 118.05 239.0	UNICOM 123.075 (CTAF) 1
------------------------	--	-----------------------------------

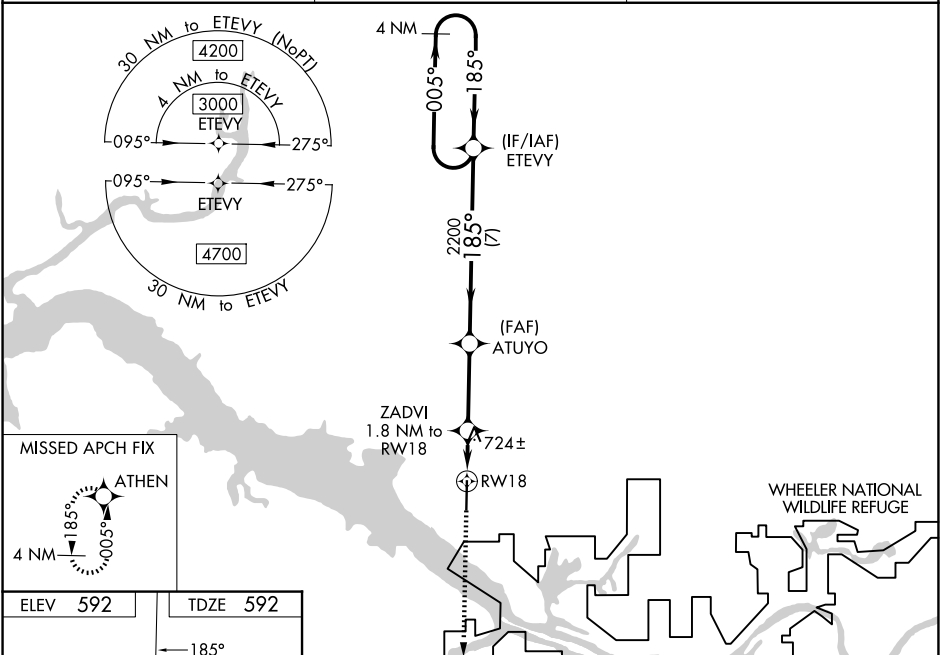

ELEV 592	TDZE 592
185°	
81	
6107 X 100	
36	
☆	
□	
HIRL Rwy 18-36 1	
REIL Rws 18 and 36 1	

3000	ATHEN
*LNAV only	
RW18	ZADVI 1.8 NM to RW18
*1.1 NM to RW18	ATUYO 2200
1180	2200
1.1 NM	0.7
3.1 NM	7 NM
ETE VY 4 NM Holding Pattern	
005° 185° 3000	
GP 3.00° TCH 47	

CATEGORY	A	B	C	D
LPV DA	792-¾		200 (200-¾)	
LNAV/VNAV DA	895-1		303 (400-1)	
LNAV MDA	980-1 388 (400-1)		980-1⅛ 388 (400-1⅛)	
CIRCLING	1040-1 448 (500-1)	1060-1 468 (500-1)	1340-2¼ 748 (800-2¼)	1340-2½ 748 (800-2½)

SE-4, 01 OCT 2026 to 29 OCT 2026

SE-4, 01 OCT 2026 to 29 OCT 2026