

|                                                 |                        |                                                                 |
|-------------------------------------------------|------------------------|-----------------------------------------------------------------|
| LOC/DME I-HZL<br><b>110.5</b><br>Chan <b>42</b> | APP CRS<br><b>284°</b> | Rwy Ldg <b>4898</b><br>TDZE <b>1603</b><br>Apt Elev <b>1603</b> |
|-------------------------------------------------|------------------------|-----------------------------------------------------------------|

LOC RWY 28  
HAZLETON RGNL (HZL)

|                                                                                                                                                       |          |                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------|
| RNAV 1-GPS required for procedure entry.<br>RNAV 1-GPS required from MAP to ECEDI.                                                                    | MALS<br> | MISSED APPROACH:<br>Climb to 4400 direct<br>ECEDI and hold. |
| Rwy 28 helicopter visibility reduction below 3/4 SM NA. Inop table does not apply to Cats A/B. For inop ALS, increase Cat C/D visibility to 1 1/2 SM. |          |                                                             |

|                          |                                            |                          |                                 |
|--------------------------|--------------------------------------------|--------------------------|---------------------------------|
| AWOS-3<br><b>119.975</b> | WILKES-BARRE APP CON<br><b>126.3 256.7</b> | CLNC DEL<br><b>121.7</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|--------------------------|--------------------------------------------|--------------------------|---------------------------------|

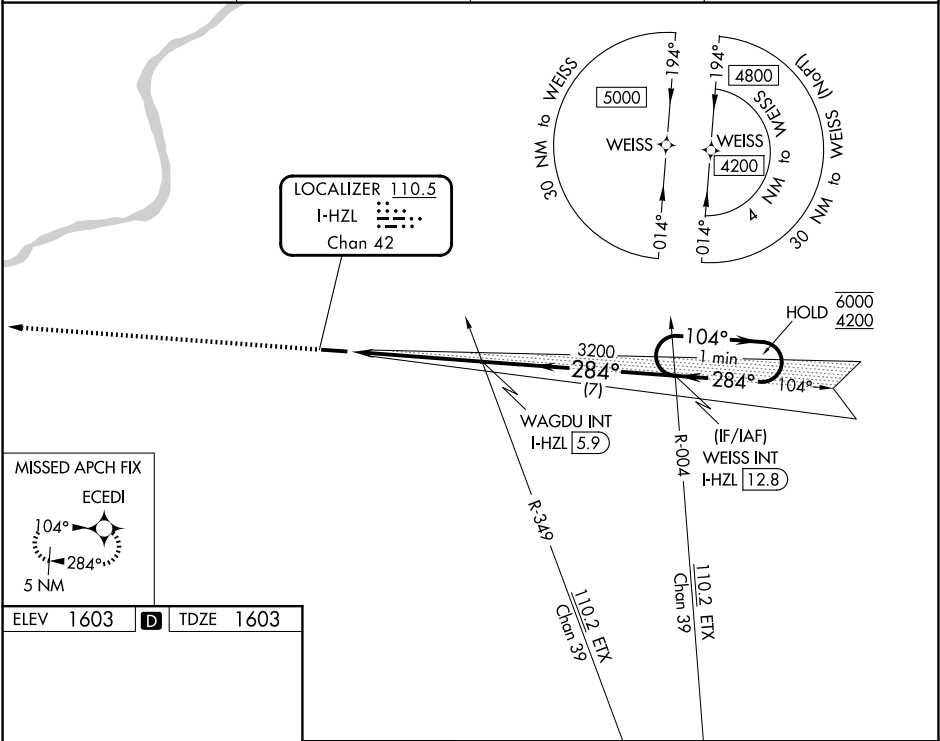


Diagram illustrating the approach path and navigation aids. The path is defined by a heading of 284°. Key navigation aids include a star symbol, a circle with a cross, and a circle with a dot. The path length is indicated as 5001 x 1000. A star symbol is also present at the top of the diagram.

4400

ECEDI

WAGDU INT  
I-HZL 5.9

WEISS INT  
I-HZL 12.8

One Minute Holding Pattern

I-HZL 2.9

I-HZL 0.9

3.00°

TCH 40

3200

1.9

3 NM

7 NM

REIL Rwy 10

MIRL Rwy 10-28

FAF to MAP 4.9 NM

Knots

Min:Sec

|          |                    |                    |                      |                     |
|----------|--------------------|--------------------|----------------------|---------------------|
| CATEGORY | A                  | B                  | C                    | D                   |
| S-LOC 28 | 2280-1 677 (700-1) |                    | 2280-1¾ 677 (700-1¾) |                     |
| CIRCLING | 2280-1 677 (700-1) | 2400-1 797 (800-1) | 2480-2½ 877 (900-2½) | 2520-3 917 (1000-3) |