
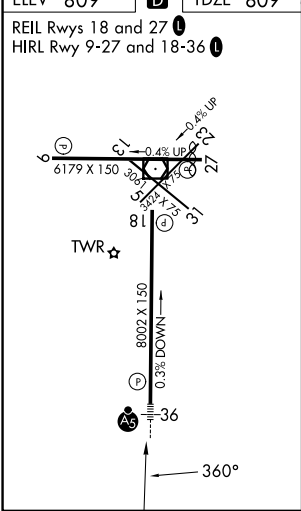


VOR/DME OSH	APP CRS	Rwy Ldg	8002
116.75	360°	TDZE	809
Chan 114 (Y)		Apt Elev	809

VOR RWY 36

WITTMAN RGNL (OSH)

Circling to Rwy 5, 13, 23, 31 NA at night. When local altimeter setting not received, use FLD altimeter setting and increase all MDAs 40 feet, S-36 visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM; LAUDE fix minimums: increase S-36 visibility Cat C/D to RVR 5500 and Circling visibility Cat D ¼ SM. For inop ALS, increase LAUDE fix minimums S-36 Cats C and D visibility to 1 ½ SM. VDP NA with FLD altimeter setting.		MALSR	MISSED APPROACH: Climbing right turn to 3000 on OSH VOR/DME R-111 to LEWKO INT/ OSH 15.1 DME and hold.	
ATIS	MILWAUKEE APP CON	OSHKOSH TOWER ★	GND CON	UNICOM
125.9	127.0 263.075	118.5 (CTAF) 290.9	132.3	122.95

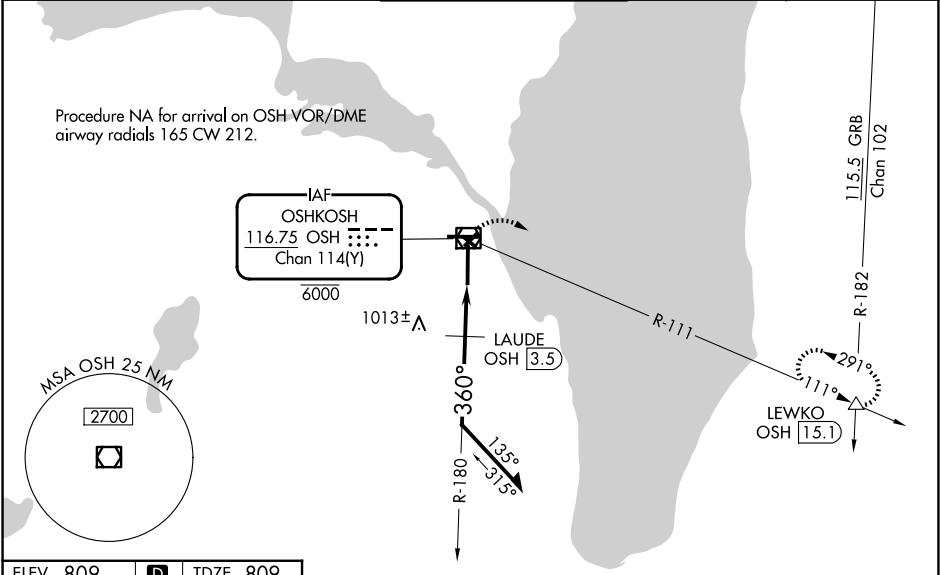

3000

LEWKO

△

OSHKOSH R-111

*1500 when using FLD altimeter setting.

OSHKOSH VOR/DME

6000

OSHKOSH 2.9

LAUDE OSH 3.5

2.96°

TCH 52

360°

*1460

1.3 NM

0.6 NM

180°

2300

Remain within 10 NM

CATEGORY	A	B	C	D
S-36	1460/24	651 (700-½)	1460-1¾	651 (700-1¾)
CIRCLING	1460-1	651 (700-1)	1460-1¾	1460-2
			651 (700-1¾)	651 (700-2)
LAUDE FIX MINIMUMS (DME REQUIRED)				
S-36	1280/24	471 (500-½)	1280/50	471 (500-1)
CIRCLING	1280-1	1300-1	1360-1½	1440-2
	471 (500-1)	491 (500-1)	551 (600-1½)	631 (700-2)