RNAV (RNP) Z RWY 30

GARY/CHICAGO INTL (GYY)

APP CRS	Rwy Ldg	7959
306°	TDZE	591
	Apt Elev	597


RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C. Missed approach requires RNP less than 1.0. For inop ALS, increase RNP 0.30 all Cats visibility to 1⅜ SM.


MALSR

MISSED APPROACH: Climb to 2100 on track 306° to HOSEN, right turn to DANGE, then track 028° to KEGLE and hold.


D-ATIS	CHICAGO APP CON	GARY TOWER ★	GND CON
134.575	133.1 285.6	125.6 (CTAF) L	121.9

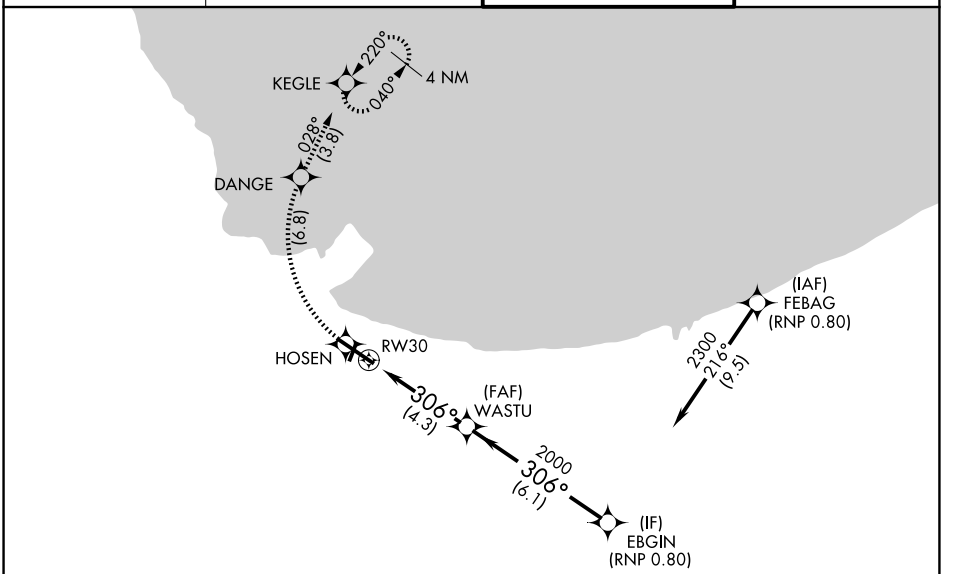

ELEV 597 D TDZE 591



REIL Rwys 2, 12 and 20 L
HIRL Rwy 12-30 L
MIRL Rwy 2-20 L

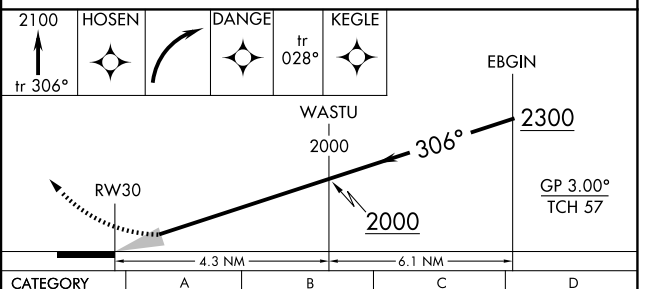

CATEGORY	A	B	C	D
RNP 0.13 DA		976/35	385 (400-⅝)	
RNP 0.30 DA		1098/55	507 (600-1)	

AUTHORIZATION REQUIRED

EC-2, 01 OCT 2026 to 29 OCT 2026
EC-2, 01 OCT 2026 to 29 OCT 2026