

RNAV (GPS) RWY 3
CHARLOTTESVILLE-ALBEMARLE (CHO)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV DA below -12°C or above 54°C. When local altimeter setting not received, use Orange altimeter setting and increase LPV DA to 910, LNAV/VNAV DA to 985, and all MDA 80 feet; increase LNAV/VNAV all Cats visibility ½ SM, LNAV Cat C/D visibility ¼ SM and Circling Cats C/D visibility ¼ SM. Baro-VNAV and VDP NA when using Orange altimeter setting. For Inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM. For inop ALS when using Orange altimeter setting, increase LPV all Cats visibility to ¾ SM, and LNAV/VNAV all Cats visibility to 1 SM.




MISSED APPROACH:
Climb to 2000 then
climbing right turn to
4000 direct GVE
VORTAC and hold.

UNICOM
122.95

Procedure NA for arrivals
at MITER on V140 northeast bound.

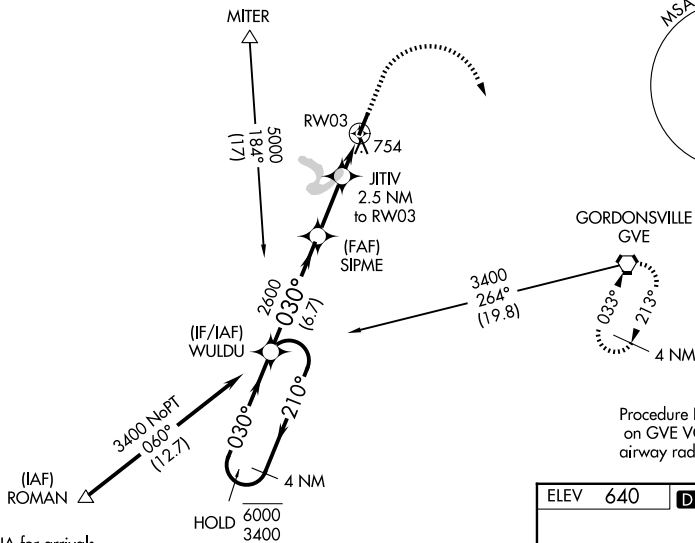

Procedure NA for arrivals at ROMAN on V290 northwest bound.

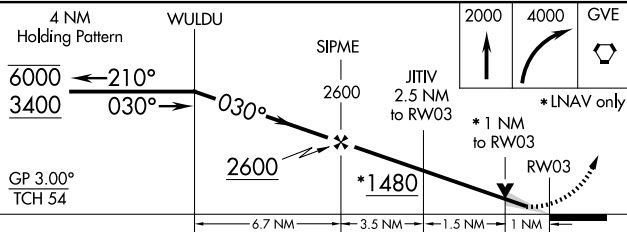

CATEGORY	A	B	C	D
LPV DA		840-1/2	200 (200-1/2)	
LNAV/ VNAV	DA	915-1/2	275 (300-1/2)	
LNAV MDA		1020-1/2 380 (400-1/2)	1020-5/8 380 (400-5/8)	
CIRCLING		1100-1 460 (500-1)	1500-2 1/2 860 (900-2 1/2)	1500-2 3/4 860 (900-2 3/4)

