

LOM AW	APP CRS	Rwy Ldg	5332
382	342°	TDZE	135
		Apt Elev	142

NDB RWY 34

ARLINGTON MUNI (AWO)

▼



NA

When local altimeter setting not received, use Whidbey Island NAS (Ault Field) altimeter setting: increase all MDA 80 feet and visibility S-34 Cats B, C, and D and Circling Cats B and C ¼ SM. For inop MALS when using Whidbey Island NAS (Ault Field) altimeter setting, increase S-34 Cats C and D visibility to 2½.

MALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct AW LOM and hold.

AWOS-3PT 135.625	SEATTLE APP CON 128.5 306.9	CTAF 122.725
---------------------	--------------------------------	-----------------

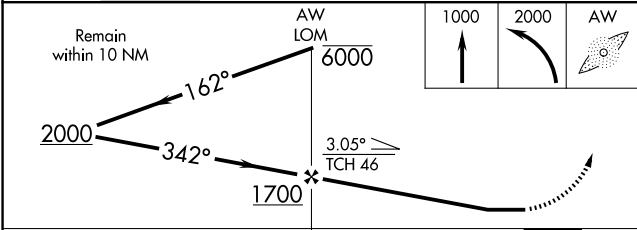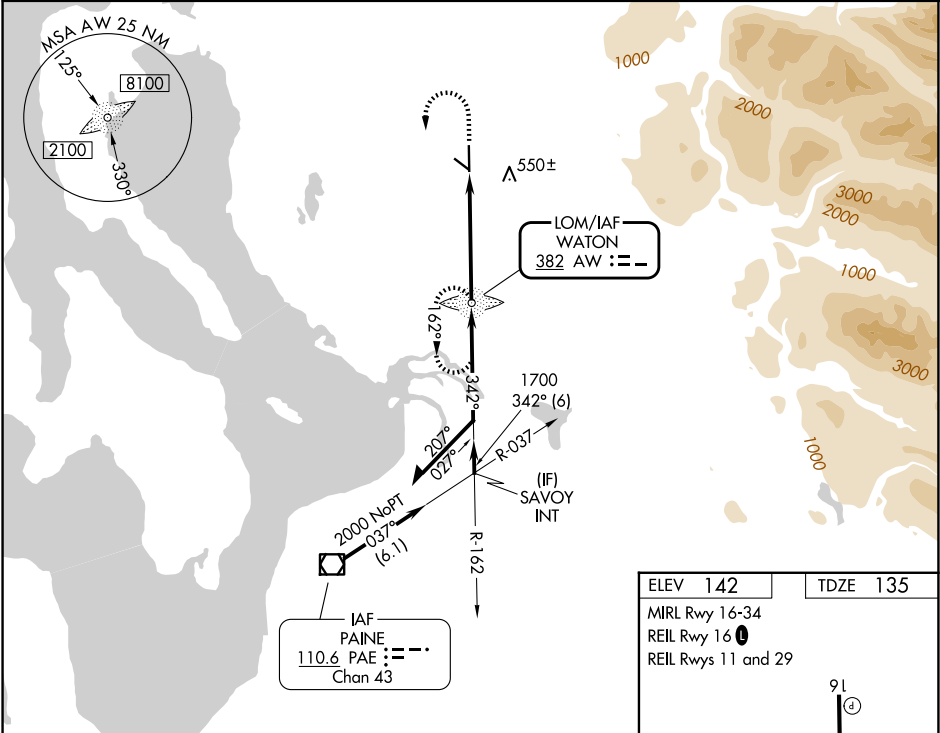

ELEV 142	TDZE 135
MIRL Rwy 16-34	
REIL Rwy 16	
REIL Rws 11 and 29	

FAF to MAP 4.7 NM					
Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34