


WAAS CH 78230 W13A	APP CRS 133°	Rwy Ldg TDZE 35 Apt Elev 36
--	------------------------	---


RNAV (GPS) Y RWY 13
VALLEY INTL (HRL)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2000 direct AMAPE and hold.
Baro-VNAV and VDP NA when using Port Isabel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. When local altimeter setting not received, use Port Isabel altimeter setting: increase LPV DA to 327 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 327 feet and all visibilities ½ SM; increase all MDAs 60 feet and visibility Cats C and D ¼ SM.	

ATIS 124.85	VALLEY APP CON 120.7 279.5	HARLINGEN TOWER ★ 119.3 (CTAF) 0 317.6	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	--	-------------------------	-------------------------

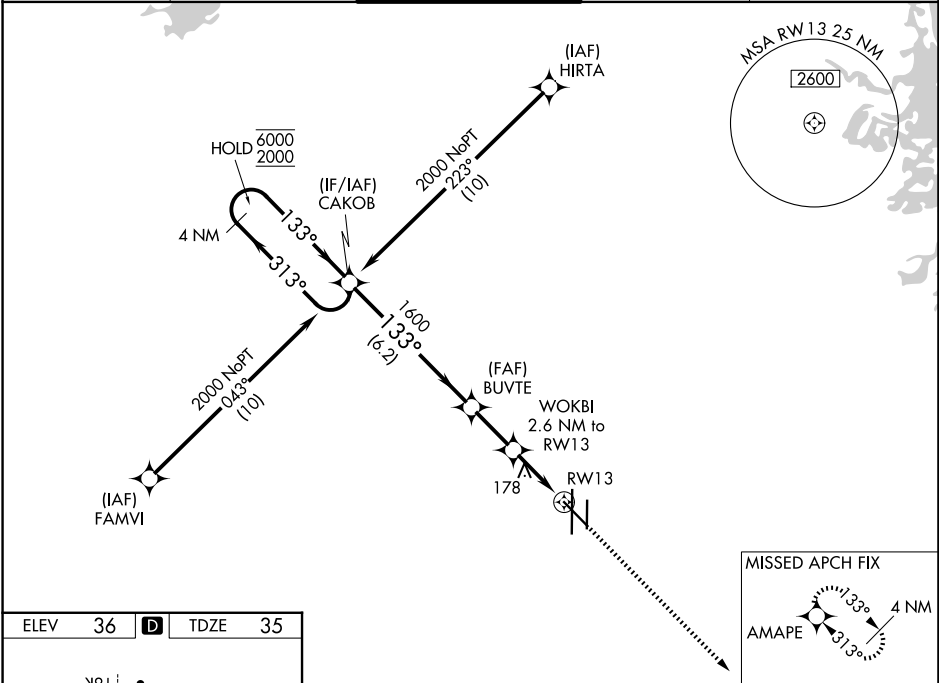

ELEV 36	D	TDZE 35
----------------	----------	----------------

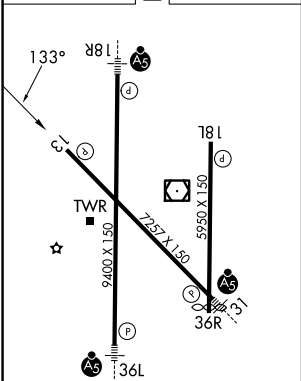

MRL Rwy 18L-36R
REIL Rwy 13 and 18L
HIRL Rwy 13-31 and 18R-36L

4 NM Holding Pattern				CAKOB	2000		2000	↑	AMAPE	✦
6000 ← 313°				133° →		133°	BUVTE	1600	WOKBI	2.6 NM to RW13
2000							1600	920	1.1 NM to RW13	RW13
GP 3.00°				TCH 59		6.2 NM		2.1 NM	1.5 NM	1.1
CATEGORY	A		B		C		D			
LPV DA	285-¾		250 (300-¾)							
LNAV/VNAV DA	285-¾		250 (300-¾)							
LNAV MDA	440-1		405 (500-1)		440-1½		405 (500-1½)			
CIRCLING	460-1		560-1		600-1½		680-2			
	424 (500-1)		524 (600-1)		564 (600-1½)		644 (700-2)			