

WAAS
CH **77712**
W18A

APP CRS
182°

Rwy Ldg **7150**
TDZE **344**
Apt Elev **346**

RNAV (GPS) RWY 18

TUPELO RGNL (TUP)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C (16°F) or above 54°C (130°F). When local altimeter not received, use Columbus AFB altimeter setting and increase all DA 112 feet and all MDA 120 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats visibility ½ mile and LNAV Cats C and D ½ mile and Circling Cats C and D ½ mile. Baro-VNAV and VDP NA when using Columbus AFB altimeter setting.

MISSED APPROACH:
Climb to 3000 direct GAGYE and hold.

ASOS 133.525	MEMPHIS CENTER 128.5 279.55	TUPELO TOWER ★ 118.775 (CTAF) 0 254.275	GND CON 121.825 254.275
------------------------	---------------------------------------	---	-----------------------------------

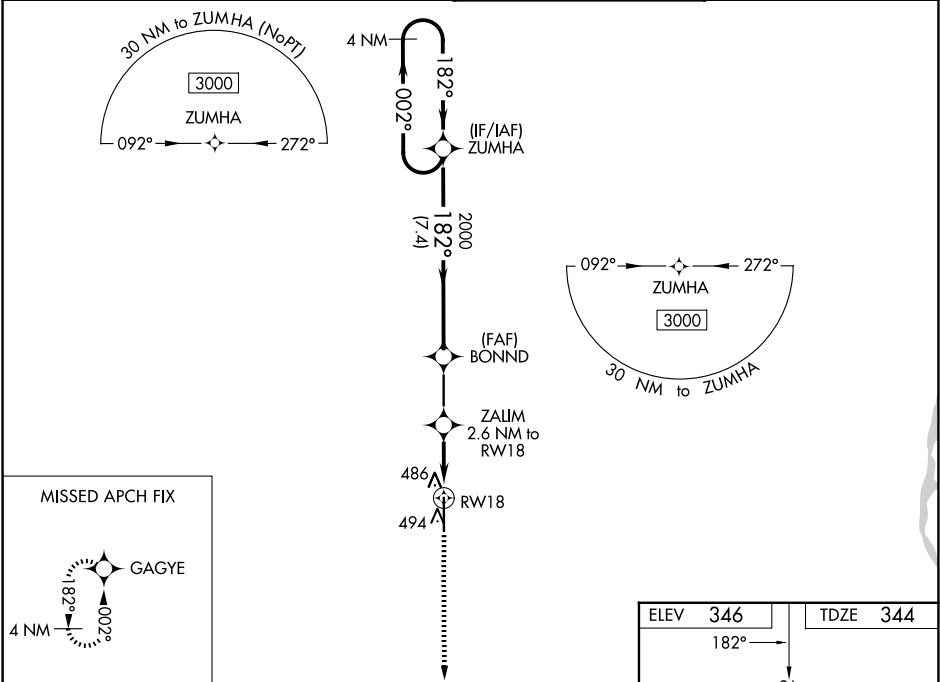

3000	GAGYE
*LNAV only.	
*1.1 NM to RW18	
*1200	
1.1 NM 1.5 NM 2.5 NM 7.4 NM	
LPV DA	544-¾ 200 (200-¾)
LNAV/VNAV DA	659-1 315 (400-1)
LNAV MDA	740-1 396 (400-1) 740-1½ 396 (400-1½)
CIRCLING	820-1 474 (500-1) 900-1½ 554 (600-1½) 1140-2½ 794 (800-2½)

