

WAAS CH 93734 W35A	APP CRS 351°	Rwy Ldg 4996 TDZE 762 Apt Elev 782
--	------------------------	---

RNAV (GPS) RWY 35

ANDERSON RGNL (AND)



▼

⚠

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Clemson altimeter setting and increase all MDA 60 feet; increase all Cats C and D visibility ¼ mile. Straight-in Rwy 35 NA at night, Circling Rwy 17, 35 NA at night. Rwy 17, 35 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 3200 direct
UTOTE and hold.

ASOS 120.675	GREER APP CON ★ 118.8 270.275	CTAF 123.60
------------------------	---	-----------------------

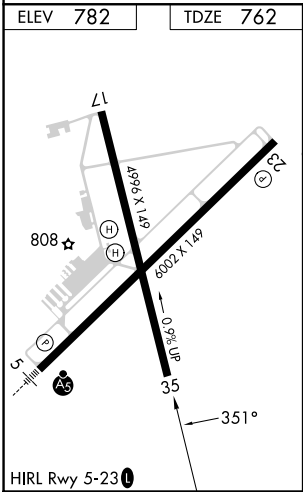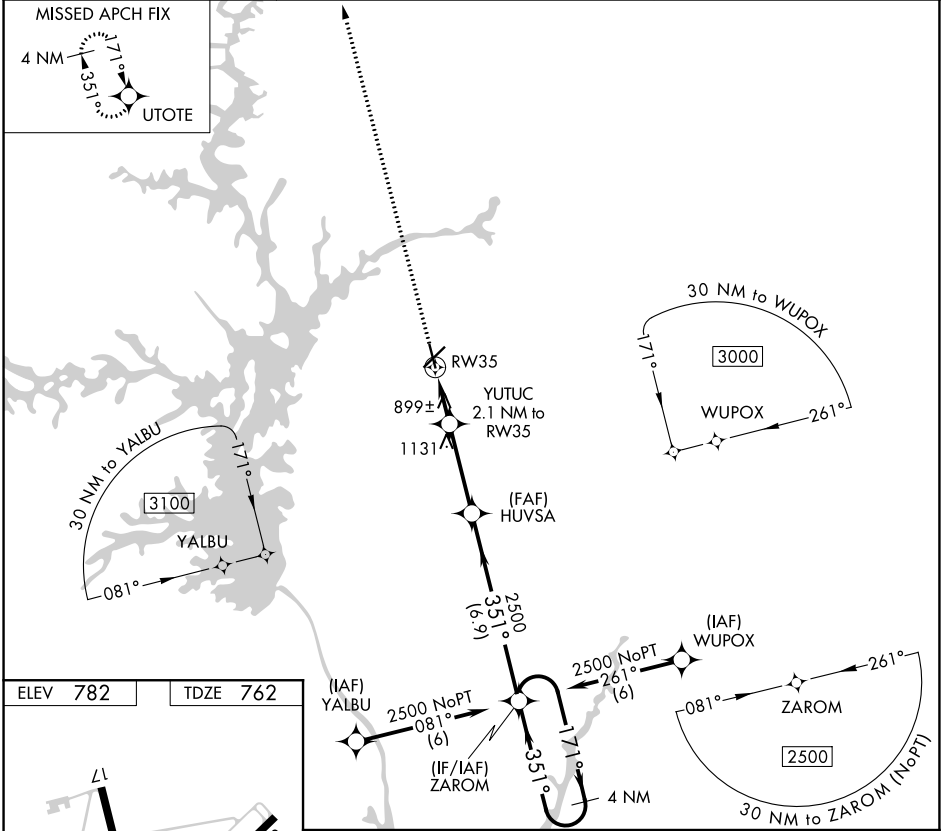

3200	UTOTE	Visual Segment - Obstacles.			
		YUTUC 2.1 NM to RW35	HUVSA	ZAROM	4 NM Holding Pattern
		RW35	2500	351°	171° → 2500
		2.1 NM	3.3 NM	6.9 NM	
CATEGORY	A	B	C	D	
LP MDA	1160-1	398 (400-1)	1160-1½	398 (400-1½)	
LNAV MDA	1180-1	418 (400-1)	1180-1½	418 (400-1½)	
CIRCLING	1260-1 478 (500-1)	1320-1 538 (600-1)	1440-1¾ 658 (700-1¾)	1500-2¼ 718 (800-2¼)	

SE-2, 01 OCT 2026 to 29 OCT 2026

SE-2, 01 OCT 2026 to 29 OCT 2026