

LOC/DME I-TYN	APP CRS	Rwy Ldg
110.9	036°	8000
Chan 46		TDZE 39
		Apt Elev 41




ILS or LOC RWY 4R
LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)

DME required for procedure entry and for LOC only.

▼ Rwy 4R helicopter visibility reduction below 1 SM NA. Circling to Rwy 4L, 11, and 22R NA at night. Rwy 4R Straight-in and Circling minimums NA at night. When local altimeter setting not received, use ARA altimeter setting and increase S-ILS 4R DA to 350 feet, increase all MDAs 40 feet and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 2000 on LFT VORTAC R-035 to BEDDY INT/LFT 18.9 DME and hold.

ATIS 134.05	LAFAYETTE APP CON★ 121.1 363.0	LAFAYETTE TOWER★ 118.5 (CTAF) 0 257.8	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

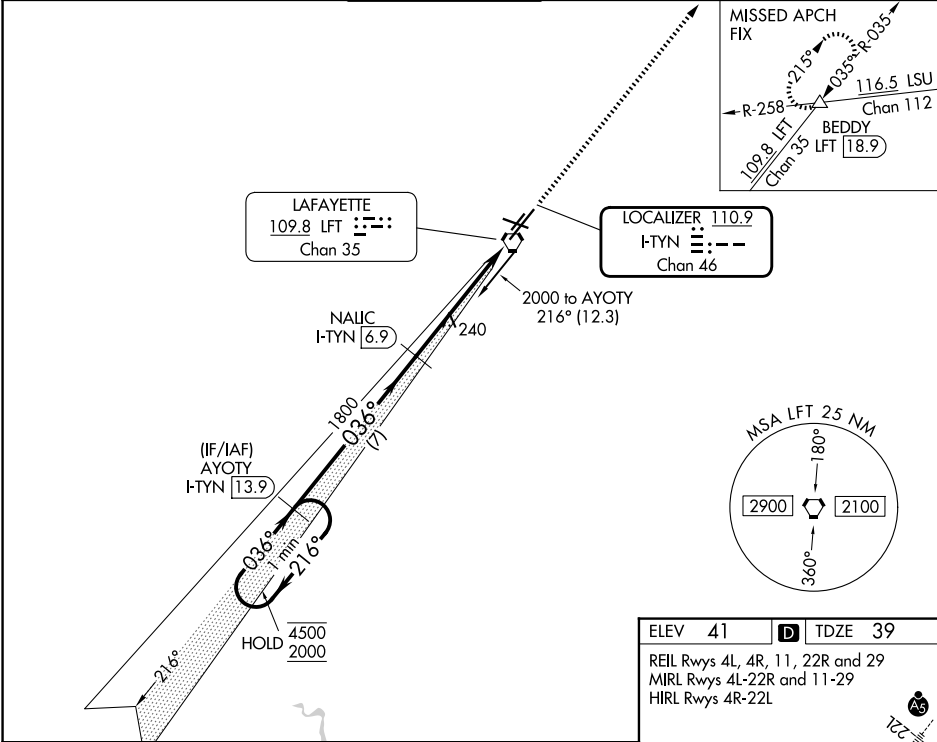

ELEV 41	D TDZE 39
REIL Rwy 4L, 4R, 11, 22R and 29	
MIRL Rwy 4L-22R and 11-29	
HIRL Rwy 4R-22L	

CATEGORY	One Minute Holding Pattern			
	AYOTY I-TYN 13.9			
	NAIIC I-TYN 6.9			
	I-TYN 1.6			
	2000 BEDDY			
GS 3.00° TCH 49				
7 NM 5.4 NM				
216° 036° 036° 1800				
4500 2000				
S-ILS 4R 321-1 282 (300-1)				
S-LOC 4R 500-1 461 (500-1) 500-1 461 (500-1)				
CIRCLING 540-1 499 (500-1) 580-1 539 (600-1) 700-1 659 (700-1) 700-2 659 (700-2)				

