

LOC I-MSS 108.7	APP CRS 045°	Rwy Ldg 5601 TDZE 205 Apt Elev 221
---------------------------	------------------------	---


ILS or LOC RWY 5
MASSENA INTL-RICHARDS FLD (MSS)

ADF required. ADF and RADAR required for procedure entry.

T Circling Rwy 9, 23, 27 NA at night. When local altimeter setting not received, use PTD altimeter setting: increase S-LS 5 DA to 528 feet and all visibilities $\frac{1}{4}$ SM; increase all MDAs 80 feet and S-LOC 5 visibility Cats C and D $\frac{1}{8}$ SM, and Circling visibility Cats C and D $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 1200 then
climbing left turn to
2300 direct MISSE
LOM and hold.

ASOS 128,075	BOSTON CENTER 135.25 377.1	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

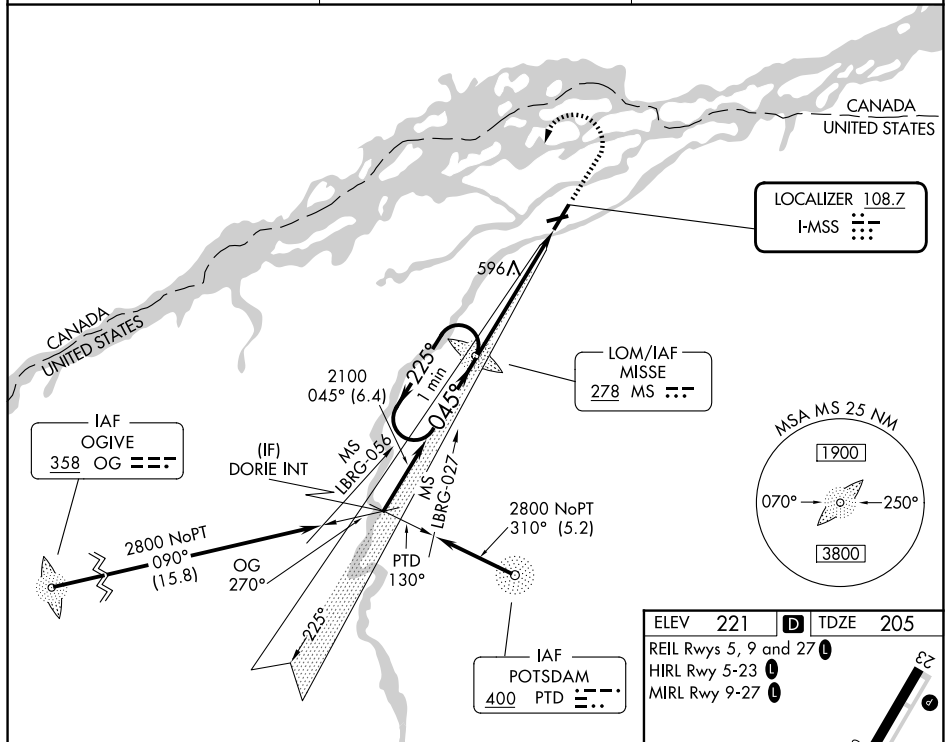

One Minute Holding Pattern

MISE LOM 1994

2300 ← 225°
045° →

GS 3.00°
TCH 54

2100

045°

5.4 NM

Legend:
1200 (vertical arrow)
2300 (curved arrow)
MS (diamond symbol)

CATEGORY	A	B	C	D
S-ILS 5	455- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$)			
S-LOC 5	800-1	595 (600-1)	800-1 $\frac{3}{4}$	595 (600-1 $\frac{3}{4}$)
CIRCLING	800-1	579 (600-1)	880-1 $\frac{3}{4}$ 659 (700-1 $\frac{3}{4}$)	900-2 $\frac{1}{4}$ 679 (700-2 $\frac{1}{4}$)

