

WAAS CH 78123 W26A	APP CRS 257°	Rwy Ldg TDZE 384 Apt Elev 403
--	------------------------	---

RNAV (GPS) RWY 26

LANCASTER (LNS)


⚠

Night landing: Rwy 13, 31 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Harrisburg Intl altimeter setting and increase all DA 64 feet, all MDA 80 feet, increase LPV and LNAV/VNAV visibility all Cats and LNAV and Circling Cat C and D visibility ¼ mile. Baro-VNAV and VDP NA when using Harrisburg Intl altimeter setting.

MISSED APPROACH:
Climb to 3000 direct FANRU and on track 331° to BAARN and hold.

ATIS 125,675	HARRISBURG APP CON 126.45 281.525	LANCASTER TOWER ★ 120.9 (CTAF) 0 251.1	GND CON 121.8	UNICOM 122.95
------------------------	---	--	-------------------------	-------------------------

RADAR REQUIRED

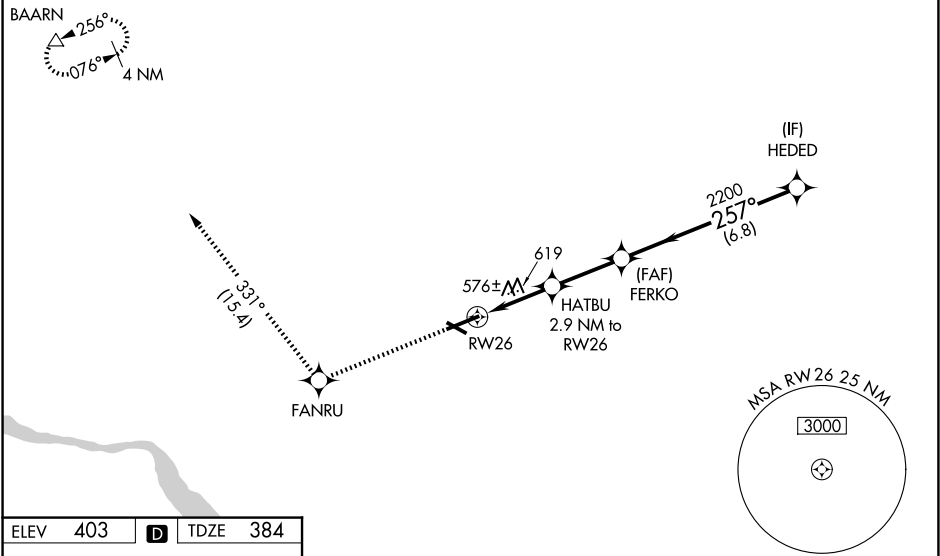

ELEV 403	D	TDZE 384
-----------------	----------	-----------------

TWR

6933 X 150

4102 X 100

5

257°

0.3% UP

3000

FANRU

tr 331°

BAARN

*LNAV only

HATBU

2.9 NM to RW26

FERKO

2200

HEDED

3000

GP 3.00°

TCH 47

1.9

1 NM

2.7 NM

6.8 NM

CATEGORY	A	B	C	D
LPV DA	634-¾ 250 (300-¾)			
LNAV/VNAV DA	905-1¾ 521 (500-1¾)			
LNAV MDA	1020-1	636 (700-1)	1020-1⅞	636 (700-1⅞)
CIRCLING	1020-1	617 (700-1)	1020-1⅞	1060-2

REIL Rwy 31

HIRL Rwy 8-26

MIRL Rwy 13-31