

WAAS CH 63122 W35A	APP CRS 346°	Rwy Ldg TDZE Apt Elev	6932 311 321
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

EASTERWOOD FLD (CLL)

RNP APCH - GPS.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C.



▲

For inop ALS, increase LPV Cat E visibility to ¾ SM, increase LNAV/VNAV all Cats visibility to ¾ SM, increase LNAV Cat E visibility to 1¾ SM.

MALSRL

MISSED APPROACH:
Climb to 2100 direct ZAKBU and hold.

ATIS 126.85	HOUSTON APP CON 134.3 360.85	EASTERWOOD TOWER★ 118.5 (CTAF) 0 284.7	GND CON 128.7 284.7	UNICOM 122.95
-----------------------	--	--	-------------------------------	-------------------------

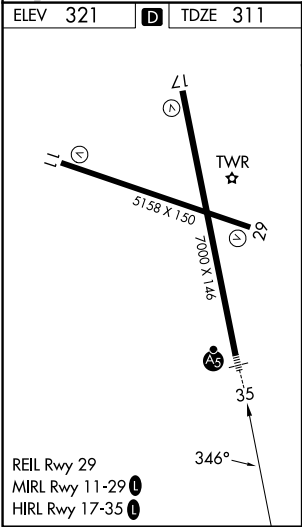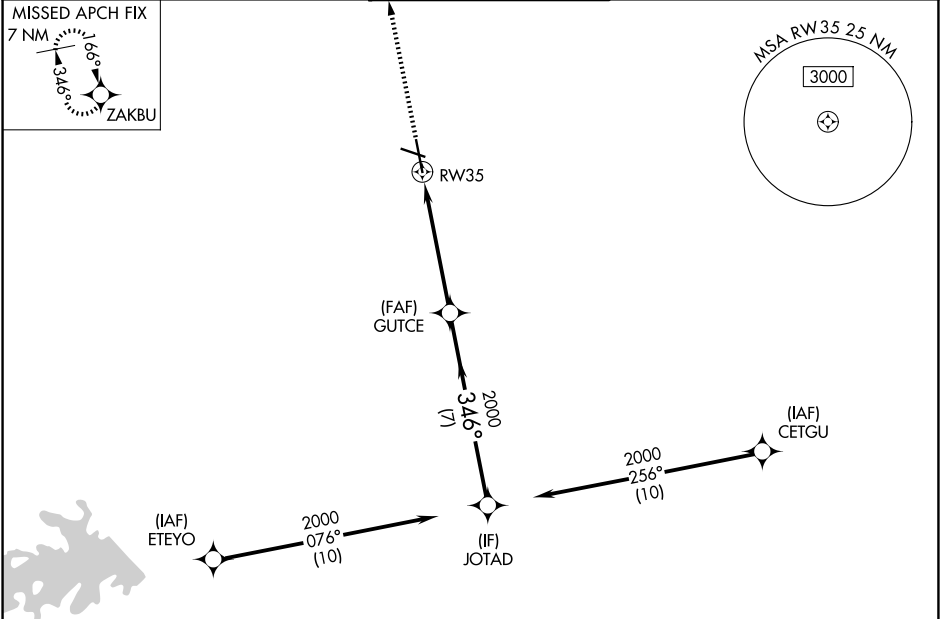

2100	ZAKBU	GUTCE	JOTAD		
		2000		2000	
		1.3 NM to RW35		346°	2000
				2000	
		1.3 NM	3.9 NM	7 NM	
CATEGORY	A	B	C	D	E
LPV DA	511-½ 200 (200-½)				
LNAV/VNAV DA	619-½ 308 (300-½)				
LNAV MDA	760-½	449 (500-½)	760-⅞	449 (500-⅞)	
CIRCLING	860-1 539 (600-1)	880-1 559 (600-1)	1000-2 679 (700-2)	1180-2¾ 859 (900-2¾)	1180-3 859 (900-3)