



WAAS CH 69217 W04A	APP CRS 044°	Rwy Ldg TDZE Apt Elev	7701 889 913
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4
CHIPPEWA VALLEY RGNL (EAU)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Rice Lake Rgnl/Carl's Fld altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rice Lake Rgnl/Carl's Fld altimeter setting and increase LPV DA to 1199, LNAV/VNAV DA to 1489 and all visibilities $\frac{7}{8}$ SM. Increase all MDA 120 feet and LNAV Cat C/D and Circling Cat C visibility $\frac{1}{4}$ SM. Circling Rwy 32 NA at night.

MISSED APPROACH:
Climb to 3000 direct
IROKE and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER ★ 118.575 (CTAF) 0	GND CON 120.925
------------------------	--	--	---------------------------

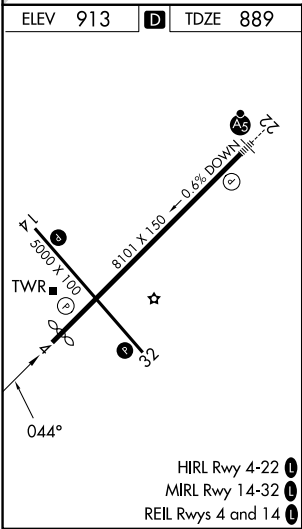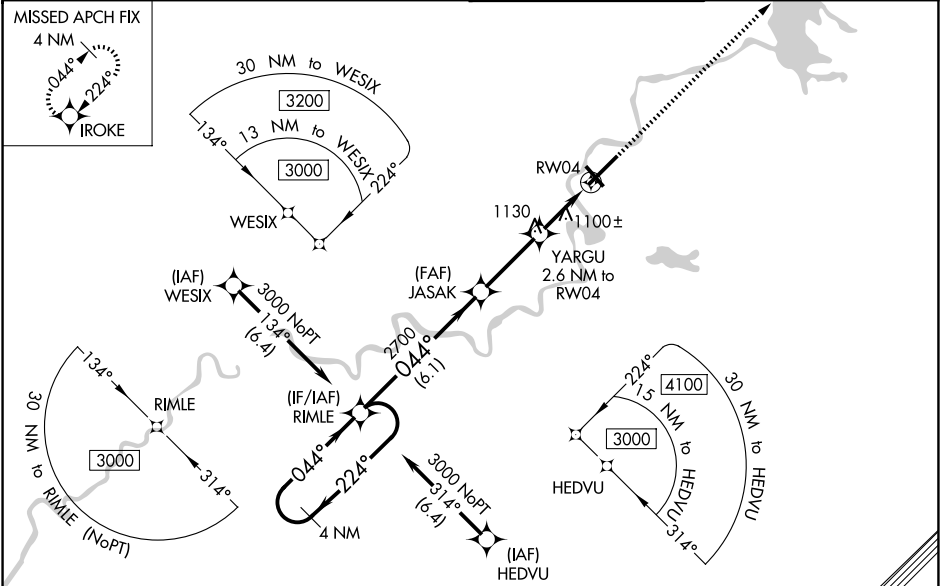

ELEV 913 D TDZE 889				
GP 3.00° TCH 44				
CATEGORY	A	B	C	D
LPV DA	1089- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)			
LNAV/VNAV DA	1379-1 $\frac{5}{8}$ 490 (500-1 $\frac{5}{8}$)			
LNAV MDA	1360-1	471 (500-1)	1360-1 $\frac{3}{8}$	471 (500-1 $\frac{3}{8}$)
CIRCLING	1480-1 567 (600-1)	1540-1 627 (700-1)	1660-2 $\frac{1}{4}$ 747 (800-2 $\frac{1}{4}$)	2200-3 1287 (1300-3)