


WAAS CH 72801 W12A	APP CRS 128°	Rwy Ldg TDZE Apt Elev	8399 873 873
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12

WATERLOO RGNL (A.L.O)

RNP APCH - GPS.			MALSR 	MISSED APPROACH: Climb to 3400 direct KUCTE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats to RVR 5500. # RVR 1800 authorized with use of FD or AP or HUD to DA.				
ATIS 120.65	DES MOINES APP CON ★ 118.9 251.15	WATERLOO TOWER ★ 125.075 (CTAF) 0 257.8	GND CON 121.9 269.1	UNICOM 122.95

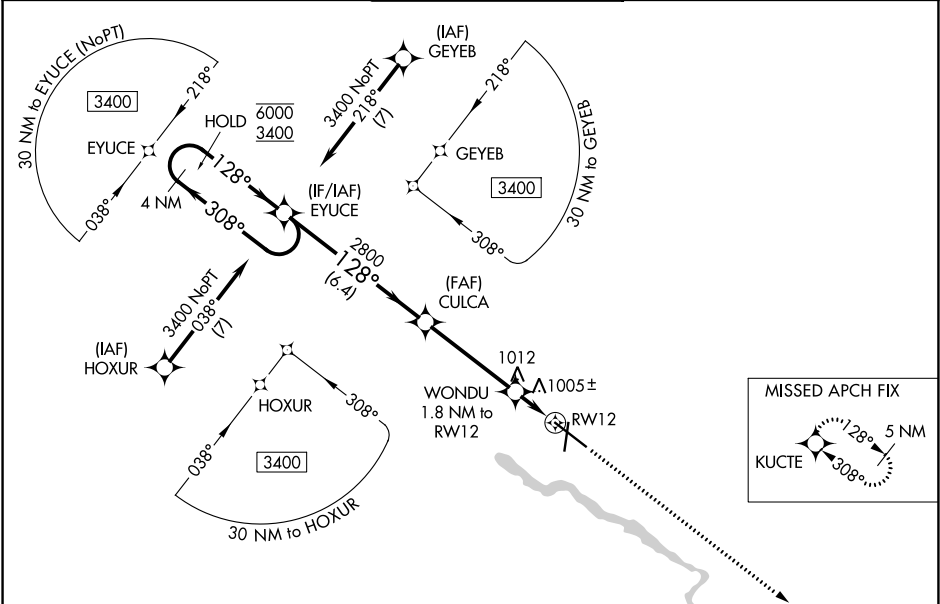

4 NM Holding Pattern 6000 3400 ←308° 128°→ 128°↘ 2800 ↘2800 1500 EYUCE CULCA WONDU 1.8 NM to RW12 1 NM to RW12 3400 KUCTE GP 3.00° TCH 55 6.4 NM 4.1 NM 0.8 NM 1 NM					ELEV 873 D TDZE 873 128° 81 8399 X 150 6003 X 150 36 TWR A4 A5 36 81 128° 81 8399 X 150 6003 X 150 36 TWR A4 A5 36 81				
CATEGORY	A		B		C	D			
LPV DA#	1073/24 200 (200-½)								
LNAV/VNAV DA	1252/35 379 (400-¾)								
LNAV MDA	1260/24 387 (400-½)			1260/35 387 (400-¾)					
CIRCLING	1360-1 487 (500-1)		1400-1 527 (600-1)		1480-1¾ 607 (700-1¾)		1600-2¼ 727 (800-2¼)		
HIRL Rwy 12-30									
MIRL Rwy 18-36									
REIL Rws 18 and 36									