

VORTAC CVA	APP CRS	Rwy Ldg	4001
113.8	216°	TDZE	750
Chan 85		Apt Elev	751


VOR RWY 21
DAVENPORT MUNI (DVN)

▼ Rwy 21 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use MLL altimeter setting and increase all MDAs 60 feet and S-21 visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

▲

MISSED APPROACH: Climbing right turn to 2400 direct CVA VORTAC and hold.

ASOS 120.175	QUAD CITY APP CON* 125.95 257.8	CLNC DEL 118.35	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------	---------------------------------

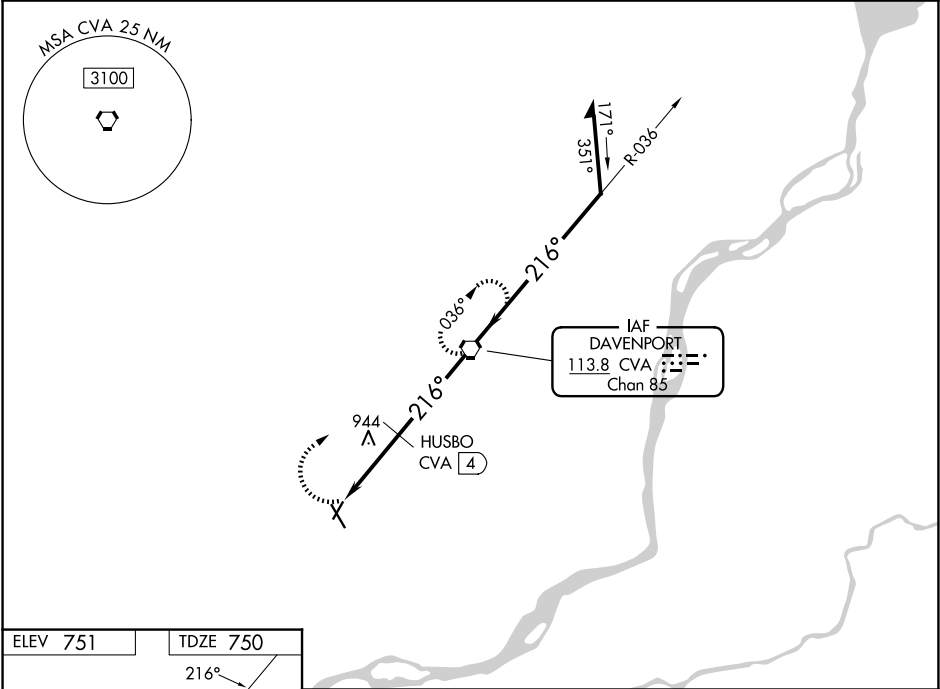

ELEV 751 TDZE 750

MRL Rwy 3-21
HIRL Rwy 15-33
REIL Rwys 3, 21, and 33

FAF to MAP 7.1 NM

Knots	60	90	120	150	180
Min:Sec	7:06	4:44	3:33	2:50	2:22

2400

CVA

2700

CVA VORTAC

2400

Remain within 10 NM

036°

216°

CVA

7.1

HUSBO

CVA

4

1260*

3.1 NM

4 NM

*1320 when using MLI altimeter setting.

CATEGORY	A	B	C	D
S-21	1260-1 510 (600-1)		1260-1⅓ 510 (600-1⅓)	
CIRCLING	1300-1 549 (600-1)		1300-1½ 549 (600-1½)	1320-2 569 (600-2)
HUSBO FIX MINIMUMS (DME REQUIRED)				
S-21	1200-1 450 (500-1)		1200-1⅓ 450 (500-1⅓)	
CIRCLING	1300-1 549 (600-1)		1300-1½ 549 (600-1½)	1320-2 569 (600-2)

NC-3, 01 OCT 2026 to 29 OCT 2026

NC-3, 01 OCT 2026 to 29 OCT 2026