

LOC/DME I-RFD

109.3

Chan **30**

APP CRS

188°

Rwy Ldg

8099

TDZE

736

Apt Elev

742

LOC BC RWY 19

CHICAGO/ROCKFORD INTL (RFD)

DME or RADAR required.

ASR

ATIS

127.6

ROCKFORD APP CON

121.0 327.0



ROCKFORD TOWER

118.1 290.375

GND CON

121.9 290.375

MISSED APPROACH: Climb to 2500 on I-RFD localizer course S (188°) to GILMY 5.8 DME/RADAR and hold, continue climb-in-hold to 2500.

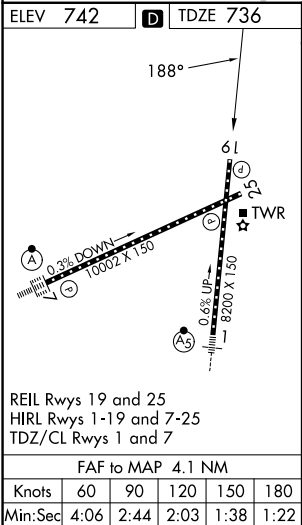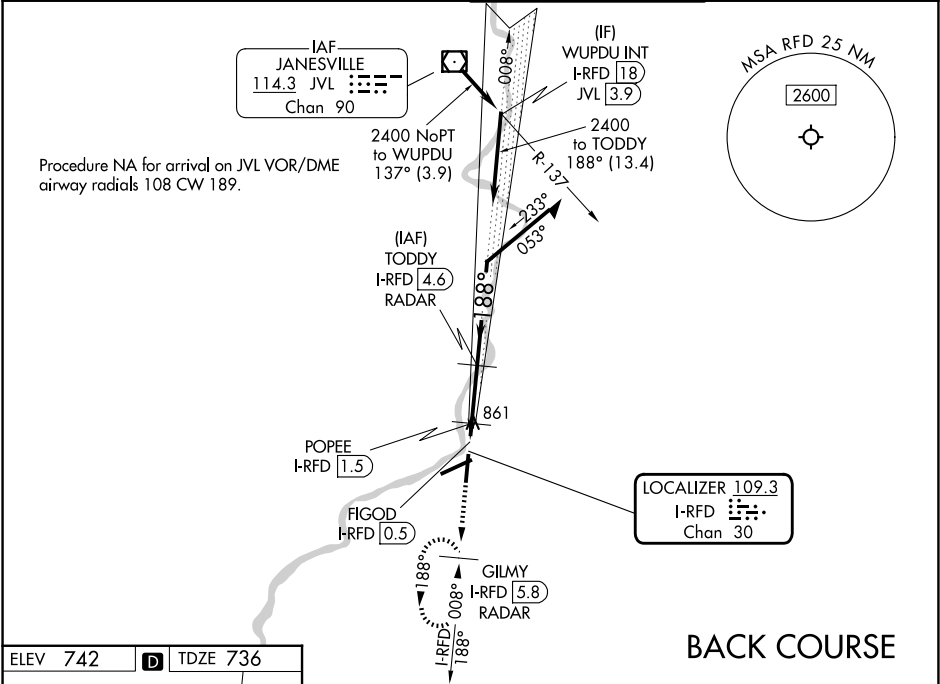

2500				
↑				
I-RFD crs S (188°)				
GILMY I-RFD [5.8] RADAR				
TODDY I-RFD [4.6] RADAR				
Remain within 10 NM				
008°				
188°				
2600				
Use I-RFD DME when on LOC course.				
Disregard glide slope indications.				
0.8 NM 3.1 NM				
TCH 75				
1260				
POPEE I-RFD [1.5]				
FIGOD I-RFD [0.5]				
CATEGORY				
A B C D				
S-19				
1260-1 524 (600-1) 1260-1½ 524 (600-1½)				
CIRCLING				
1260-1 518 (600-1) 1280-1 538 (600-1) 1320-1½ 578 (600-1½) 1460-2¼ 718 (800-2¼)				
POPEE FIX MINIMUMS (DME REQUIRED)				
S-19				
1140-1 404 (400-1) 1140-1⅛ 404 (400-1⅛)				
CIRCLING				
1220-1 478 (500-1) 1280-1 538 (600-1) 1320-1½ 578 (600-1½) 1460-2¼ 718 (800-2¼)				