


ILS or LOC RWY 27
ATHENS/BEN EPPS (AHN)

V Circling Rwy 2, 20 NA at night. VDP NA when using WDR altimeter setting.
A DME from AHN VOR/DME. Simultaneous reception of I-AHN and AHN DME required.
 When local altimeter setting not received, use WDR altimeter setting and increase S-LS 27
 DA to 1069 feet; increase all MDAs 60 feet and S-LOC 27 visibility Cat C/D $\frac{1}{4}$ SM, and
 Circling visibility Cat D $\frac{1}{4}$ SM. Inop table does not apply to S-LS 27 all Cats.

MALSF

MISSED APPROACH:
Climb to 1500 then climbing
left turn to 2500 on heading
060° and AHN VOR/DME
R-092 to VESTO INT/
AHN 23.6 DME and hold.

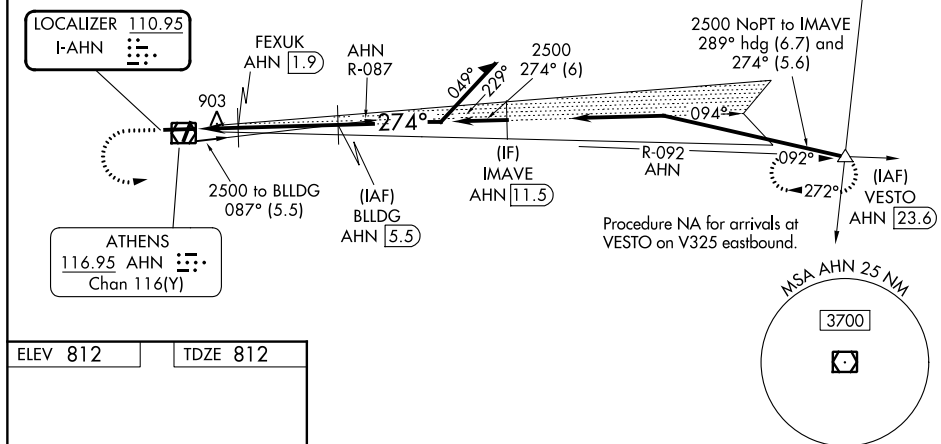

6122 X 100
0.9% UP →

TWR/BCN

20
100
3535
274°
27°

2
0.9% UP

MIRL Rwy 2-20
HIRL Rwy 9-27

FAF to MAP 5.2 NM

	Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44	

CATEGORY	A	B	C	D
S-ILS 27		1012- $\frac{3}{4}$	200 (200- $\frac{3}{4}$)	
S-LOC 27		1160- $\frac{3}{4}$	348 (400- $\frac{3}{4}$)	
CIRCLING	1260-1 448 (500-1)	1280-1 468 (500-1)	1320-1½ 508 (600-1½)	1460-2 648 (700-2)

SE-4, 01 OCT 2026 to 29 OCT 2026