

WAAS CH 69503 W27A	APP CRS 274°	Rwy Ldg 6122 TDZE 812 Apt Elev 812
--	------------------------	---

RNAV (GPS) RWY 27
ATHENS/BEN EPPS (AHN)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Circling to Rwy 2, 20 NA at night. When local altimeter setting not received, use WDR altimeter setting: increase LPV DA to 1069 feet; increase LNAV/VNAV DA to 1121 feet; increase all MDAs 60 feet and increase LNAV Cat C, D visibility ¼ SM and Circling Cat D visibility ¼ SM. Baro-VNAV and VDP NA when using WDR altimeter setting. Hop table does not apply to LPV and LNAV/VNAV all Cats.



MALSF




MISSED APPROACH: Climb to 2500 direct SALIN and hold.

ASOS 132.875	ATLANTA APP CON ★ 132.475 291.1	ATHENS TOWER ★ 126.3 (CTAF) 0 338.275	GND CON 121.8	UNICOM 122.95
-----------------	------------------------------------	--	------------------	------------------

MISSED APCH FIX

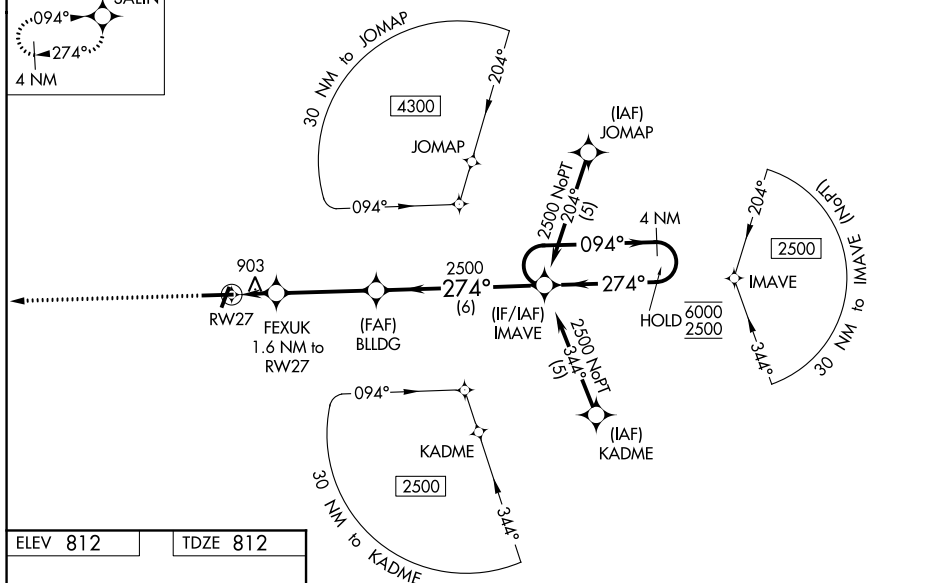


ELEV 812		TDZE 812
----------	--	----------



2500	SALIN
------	-------

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 44).

4 NM
Holding Pattern

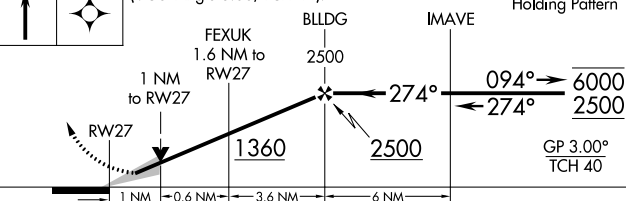

CATEGORY	A	B	C	D
LPV DA		1012- ³ / ₄	200 (200- ³ / ₄)	
LNAV/ VNAV DA		1064- ³ / ₄	252 (300- ³ / ₄)	
LNAV MDA		1160- ³ / ₄	348 (400- ³ / ₄)	
CIRCLING	1260-1 448 (500-1)	1280-1 468 (500-1)	1320-1½ 508 (600-1½)	1460-2 648 (700-2)

ATHENS, GEORGIA
Amdt 1C 03SEP26

33°57'N-83°20'W

ATHENS/BEN EPPS (AHN)

RNAV (GPS) RWY 27