
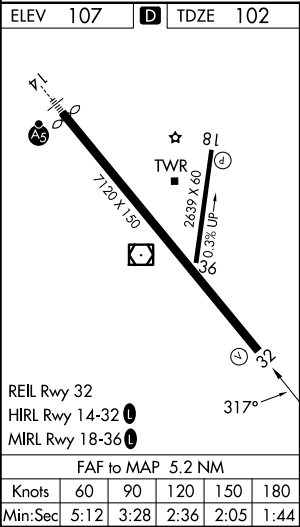


|                                                 |                        |                                                               |
|-------------------------------------------------|------------------------|---------------------------------------------------------------|
| LOC/DME I-LLM<br><b>111.7</b><br>Chan <b>54</b> | APP CRS<br><b>317°</b> | Rwy Ldg <b>7120</b><br>TDZE <b>102</b><br>Apt Elev <b>107</b> |
|-------------------------------------------------|------------------------|---------------------------------------------------------------|

ILS or LOC RWY 32  
MC ALLEN INTL (MF'E)

|                                                                                                                                                                                                |                                       |                                                       |                         |                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-------------------------------------------------------|-------------------------|-------------------------|
| <b>⚠</b> Circling NA northeast of Rwy 14-32. ADF and DME or Radar required. When local altimeter setting not received, use Weslaco altimeter setting: increase all DA 39 feet and MDA 40 feet. |                                       | MISSED APPROACH: Climb to 2100 direct MF LOM and hold |                         |                         |
| ATIS<br><b>128.5</b>                                                                                                                                                                           | VALLEY APP CON<br><b>126.55 377.2</b> | MC ALLEN TOWER ★<br><b>118.5 (CTAF) 0 256.9</b>       | GND CON<br><b>121.8</b> | UNICOM<br><b>122.95</b> |

DME or RADAR REQUIRED

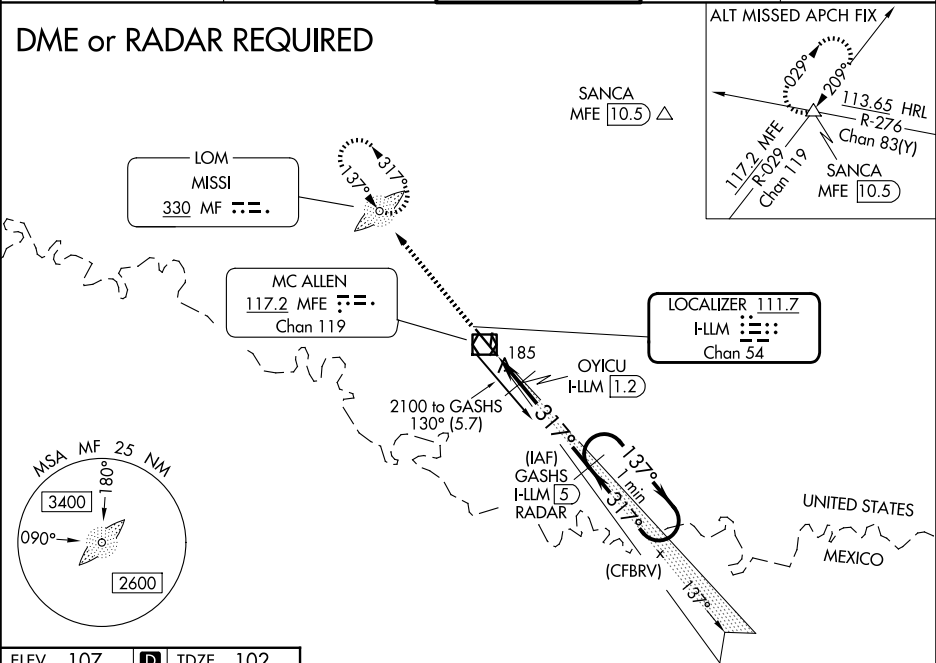

|                    |                 |                                                                 |                     |                            |
|--------------------|-----------------|-----------------------------------------------------------------|---------------------|----------------------------|
| 2100               | MF              | VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 53). | GASHS I-LLM 5 RADAR | One Minute Holding Pattern |
| *LOC only          | OYICU I-LLM 1.2 | 1800                                                            | 137°                | 2100                       |
|                    |                 | 1800                                                            | 317°                | GS 3.00° TCH 50            |
|                    |                 | *600 when using Weslaco altimeter setting.                      |                     |                            |
|                    | 1.4 NM          | 3.8 NM                                                          |                     |                            |
| CATEGORY           | A               | B                                                               | C                   | D                          |
| S-ILS 32           | 302-3/4         |                                                                 | 200 (200-3/4)       |                            |
| S-LOC 32           | 560-1           | 458 (500-1)                                                     | 560-1 3/8           | 458 (500-1 3/8)            |
| CIRCLING           | 580-1           | 473 (500-1)                                                     | 580-1 1/2           | 800-2 1/4                  |
|                    |                 |                                                                 | 473 (500-1 1/2)     | 693 (700-2 1/4)            |
| OYICU FIX MINIMUMS |                 |                                                                 |                     |                            |
| S-LOC 32           | 440-1           |                                                                 | 338 (400-1)         |                            |
| CIRCLING           | 580-1           | 473 (500-1)                                                     | 580-1 1/2           | 800-2 1/4                  |
|                    |                 |                                                                 | 473 (500-1 1/2)     | 693 (700-2 1/4)            |