


TACAN RWY 20R  
FAIRBANKS INTL (FAI) (PAFA)

MALSR

**MISSED APPROACH:** Climbing left turn to 4000 on heading 160° and FAI VORTAC R-107 to KRNL/FAI 13 DME and hold, continue climb-in-hold to 4000.

GND CON  
**121.9**

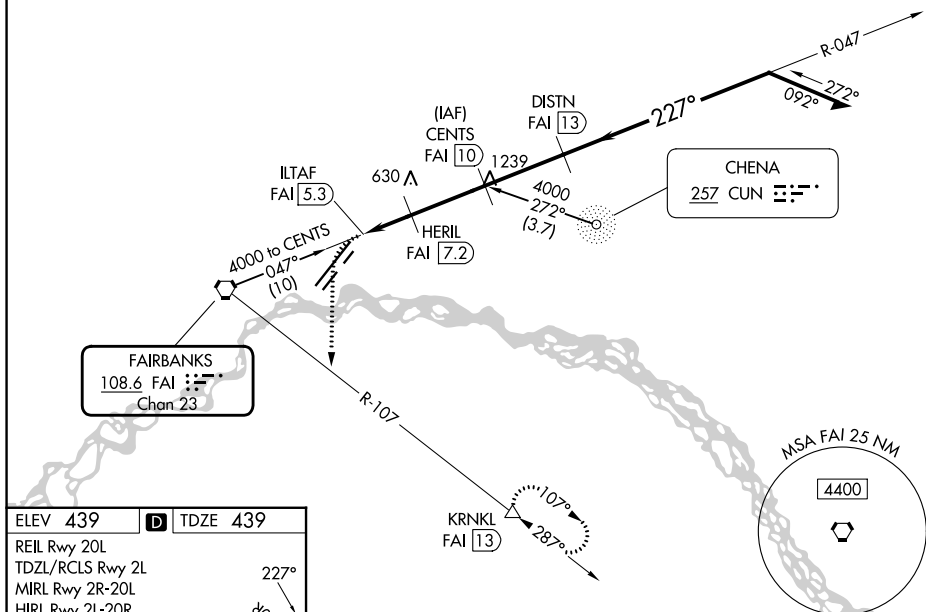

| EMERGENCY SAFE ALTITUDE 100 NM 16000 |                      |                      |                                                                                        |                                          |                                                                                |
|--------------------------------------|----------------------|----------------------|----------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------------------------|
| 4000<br>hdg<br>160°                  | FAI<br>R-107         | KRNL<br>△            | CENTS<br>FAI 10<br>VGS1 and descent angles not coincident<br>(VGS1 Angle 3.00/TCH 74). |                                          |                                                                                |
| ILTAF<br>FAI 5.3                     |                      | HERIL<br>FAI 7.2     | DISTN<br>FAI 13<br>Remain within 1.5 NM                                                |                                          |                                                                                |
| 0.7                                  |                      | 1.8 NM               | 2.8 NM                                                                                 | 3 NM                                     | 4000                                                                           |
| 1300                                 |                      | 2200                 | 3300                                                                                   | 227°                                     |                                                                                |
| 0.7                                  |                      | 1.8 NM               | 2.8 NM                                                                                 | 3 NM                                     | 4000                                                                           |
| CATEGORY                             | A                    | B                    | C                                                                                      | D                                        | E                                                                              |
| S-20R                                | 880/55               | 441 (500-1)          | 880-1 <sup>3</sup> / <sub>8</sub>                                                      | 441 (500-1 <sup>3</sup> / <sub>8</sub> ) | 1000-1 <sup>5</sup> / <sub>8</sub><br>561 (600-1 <sup>5</sup> / <sub>8</sub> ) |
| CIRCLING                             | 880-1<br>441 (500-1) | 900-1<br>461 (500-1) | 900-1 <sup>1</sup> / <sub>2</sub><br>461 (500-1 <sup>1</sup> / <sub>2</sub> )          | 1020-2<br>581 (600-2)                    | 1120-2 <sup>1</sup> / <sub>2</sub><br>681 (700-2 <sup>1</sup> / <sub>2</sub> ) |