

HI-ILS Y or LOC Y RWY 06L

LOC I-AND 109.3	APCH CRS 064°	Rwy Idg 10,527 TDZE 539 Arprt Elev 617
---------------------------	-------------------------	---

[USAF]

ANDERSEN AFB (PGUA)

ATC RADAR monitoring required.


- ▼ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE vis to 1½ miles.
** Circling not authorized NW of Rwy 06L-24R.

SALS



MISSED APPROACH: Climb to 3000, intercept UAM R-051 to FOVEM and hold.

ATIS 118.175 254.325	GUAM APP CON 119.8 269.0	TOWER 126.2 233.7	GND CON 121.7 275.8
--------------------------------	------------------------------------	-----------------------------	-------------------------------

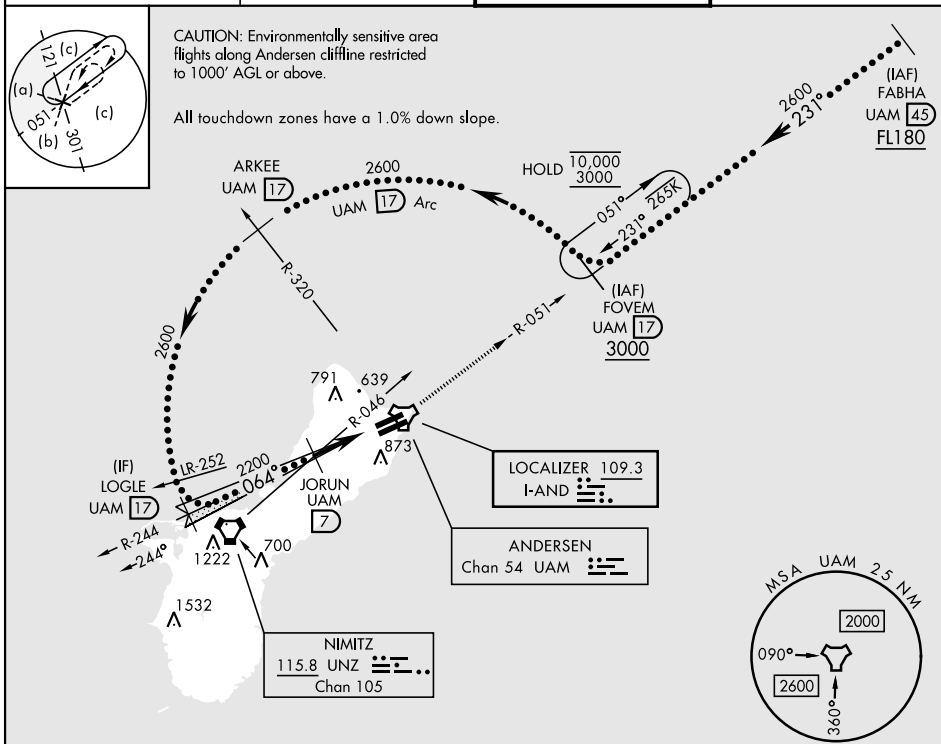

EMERG SAFE ALT 100 NM 2900

VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 59).					ELEV 617	TDZE 539
LOGLE UAM 17					HIRL all rwys	
GS 3.00° TCH 46					064°	
JORUN UAM 7					677	
UAM 3.2					0.7% UP	
KATNE UAM 2.5					10,527 x 200	
4.5 NM					0.6 NM	
2200					0.5% UP	
CATEGORY					11,199 x 200	
S-ILS 06L					611	
S-LOC 06L*					TWR 735	
CIRCLING**					FAF to MAP 4.5 NM	
1020/40 481 (500-¾)					Knots	
1060-1					120 140 160 180 200	
443 (500-1)					Min:Sec	
463 (500-1)					2:15 1:56 1:41 1:30 1:21	
623 (700-1¾)						
623 (700-2)						
623 (700-2¼)						

YIGO, GUAM I, GUAM

13° 35' N-144° 56' E

ANDERSEN AFB (PGUA)

Orig 14MAY26
TERPS

HI-ILS Y or LOC Y RWY 06L