ILS or LOC RWY 32

DELAWARE COUNTY RGNL (MIE)

LOC I-JNK	APP CRS	Rwy Ldg	6500
109.1	319°	TDZE	937
		Apt Elev	937


ADF required. RADAR required for procedure entry.


When control tower closed, except for operators with approved weather reporting service, use FWA altimeter setting. DME from MIE DME. DME use requires simultaneous reception of I-JNK and MIE DME.

MALSR

MISSED APPROACH: Climb to 1460 then climbing right turn to 2900 on direct BALLL LOM and hold, continue climb-in-hold to 2900.


ATIS	INDIANAPOLIS APP CON	MUNCIE TOWER ★	GND CON	UNICOM
133.25	120.65 317.8	120.1 (CTAF) L	121.9	122.95

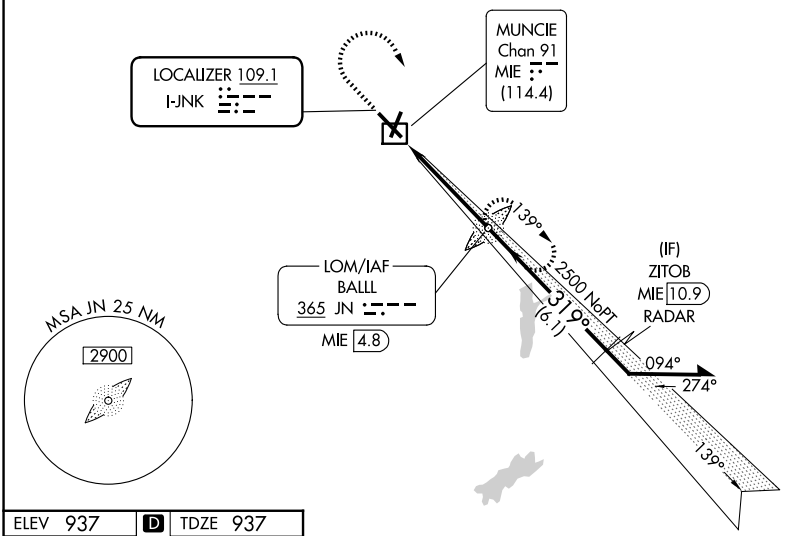

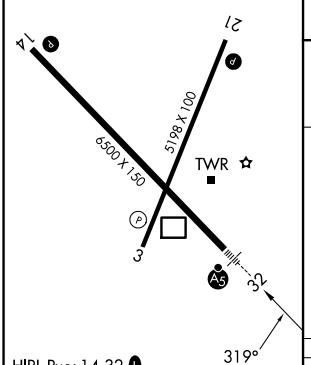

HIRL Rwy 14-32 L
MIRL Rwy 3-21 L
REIL Rwys 3, 14 and 21 L

FAF to MAP 4.6 NM					
Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

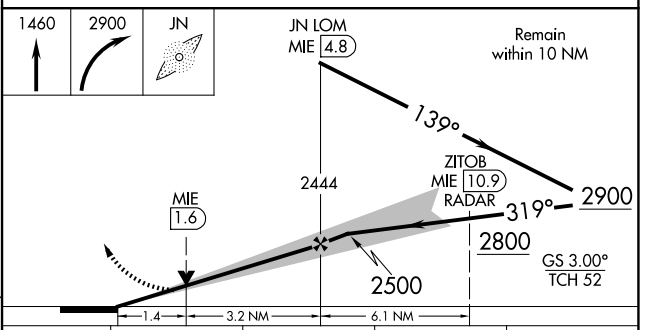

CATEGORY	A	B	C	D
S-ILS 32	1162-½		225 (300-½)	
S-LOC 32	1460-½	523 (600-½)	1460-1	523 (600-1)
CIRCLING	1460-1	523 (600-1)	1500-1½ 563 (600-1½)	1560-2 623 (700-2)

EC-2, 01 OCT 2026 to 29 OCT 2026
EC-2, 01 OCT 2026 to 29 OCT 2026