

WAAS

CH **53537**

W21A

APP CRS

205°

Rwy Ldg

5197

TDZE

935

Apt Elev

937

RNAV (GPS) RWY 21

DELAWARE COUNTY RGNL (MIE)


RNP APCH - GPS.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 21 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using FWA altimeter setting. When local altimeter setting not received, use FWA altimeter setting and increase LPV DA to 1316 feet and all visibilities ¾ SM. Increase LNAV/VNAV DA to 1472 feet and all visibilities ¾ SM. Increase all MDAs 140 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH:
Climb to 2800 direct APPAL and hold.

ATIS 133.25	INDIANAPOLIS APP CON 120.65 317.8	MUNCIE TOWER ★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

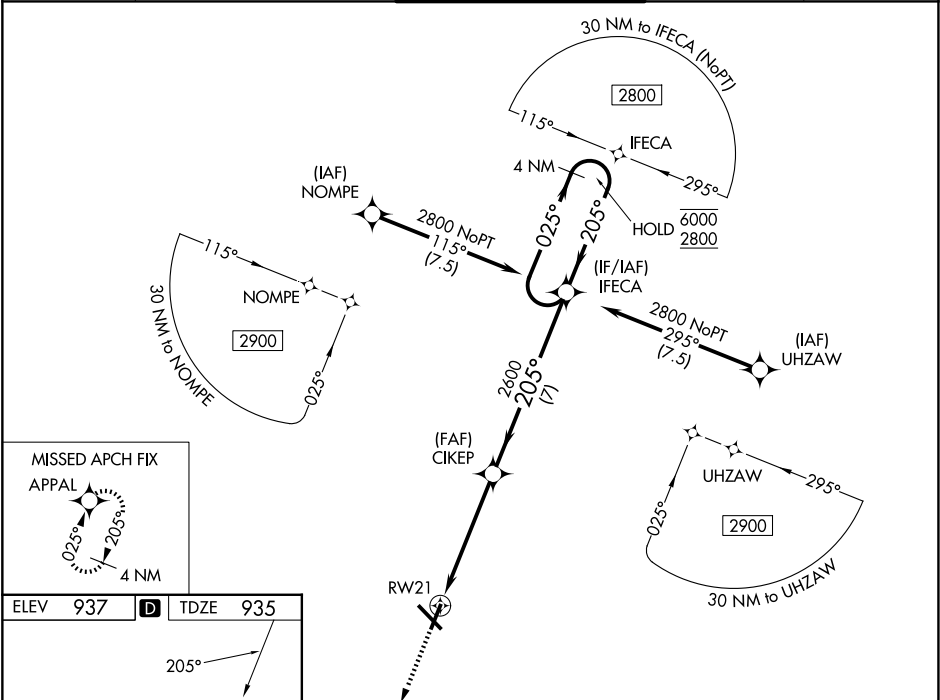

HIRL Rwy 14-32 **(L)**
MIRL Rwy 3-21 **(L)**
REIL Rws 3, 14 and 21 **(L)**

2800	APPAL	CIKEP	2600	IFECA	4 NM Holding Pattern
205°	205°	205°	205°	205°	205°
1.3 NM to RW21	1.3	3.8 NM	7 NM		
CATEGORY	A	B	C	D	
LPV DA	1195-3/4		260 (300-3/4)		
LNAV/VNAV DA	1351-1 1/8		416 (500-1 1/8)		
LNAV MDA	1400-1	465 (500-1)	1400-1 3/8	465 (500-1 3/8)	
CIRCLING	1460-1	523 (600-1)	1500-1 1/2	1600-2	
			563 (600-1 1/2)	663 (700-2)	