

LOC I-ANB	APP CRS	Rwy Ldg	7002
111.5	052°	TDZE	595
		Apt Elev	612

ILS Y or LOC Y RWY 5

ANNISTON RGNL (ANB)


⚠ Circling NA north of Rwy 5-23. RNAV 1-GPS required. For inop ALS, increase S-ILS 5 all Cats visibility to 1 SM. When local altimeter setting not received, use Gadsden altimeter setting: increase DA to 975 and all visibilities ¼ SM; increase all MDAs 80 feet, and S-LOC 5 Cat C/D, and Circling Cat C visibilities ½ SM. For inop ALS when using Gadsden altimeter setting: increase S-ILS 5 all Cats to 1¼ SM.

MALSR



MISSED APPROACH: Climb to 1600 then climbing right turn to 3500 direct CAMKU then on track 210° to CANUG and on track 300° to LINTZ and hold.

AWOS-3	BIRMINGHAM APP CON	CTAF	UNICOM
119.675	132.15 285.45	123.60	123.0

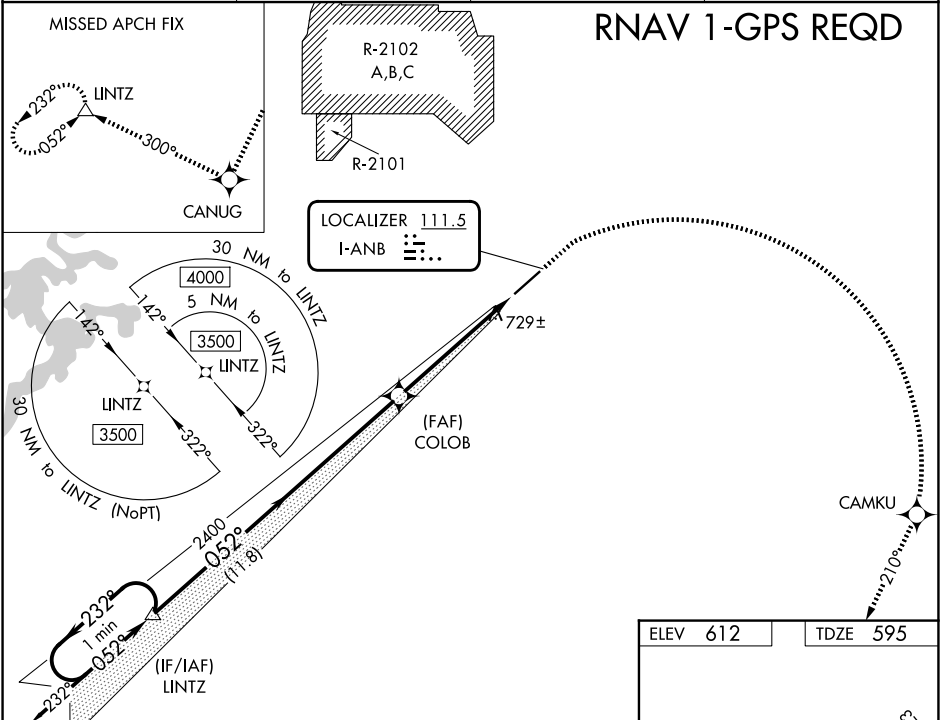

LOC restricted beyond 16° right of course.	1600	3500	CAMKU	CANUG	LINTZ
One Minute Holding Pattern	↑	↷	✧ tr 210°	✧ tr 300°	△
3500 ← 232° 052° →	COLOB	2400			
GS 3.00° TCH 40	2400				
	11.8 NM	5.5 NM			
CATEGORY	A	B	C	D	
S-ILS 5	909-½		314 (300-½)		
S-LOC 5	1120-½	525 (600-½)	1120-1	525 (600-1)	
CIRCLING	1420-1	808 (900-1)	1420-2¼ 808 (900-2¼)	1820-3 1208 (1300-3)	
FAF to MAP 5.5 NM					
Knots		60	90	120	150 180
Min:Sec		5:30	3:40	2:45	2:12 1:50