

WAAS CH 77617 W09A	APP CRS 090°	Rwy Ldg 5998 TDZE 96 Apt Elev 112
--	------------------------	--


RNAV (GPS) RWY 9
ESLER RGNL (ESF)

RNP APCH-GPS.	
---------------	--


T Circling Rwy 14, 32 NA at night. Baro-VNAV and VDP NA when using Alexandria Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. When local altimeter setting not received, use Alexandria Intl altimeter setting: increase LPV DA to 331 feet; increase LNAV/VNAV DA to 644 feet and all visibility ¼ SM; increase all MDAs 40 feet and Circling visibility Cat D ¼.

MISSED APPROACH: Climb to 3000 direct ILUL and hold.

ASOS 119.425	MAKS APP CON 125.4 254.8	UNICOM 122.8 (CTAF) 0
------------------------	------------------------------------	--

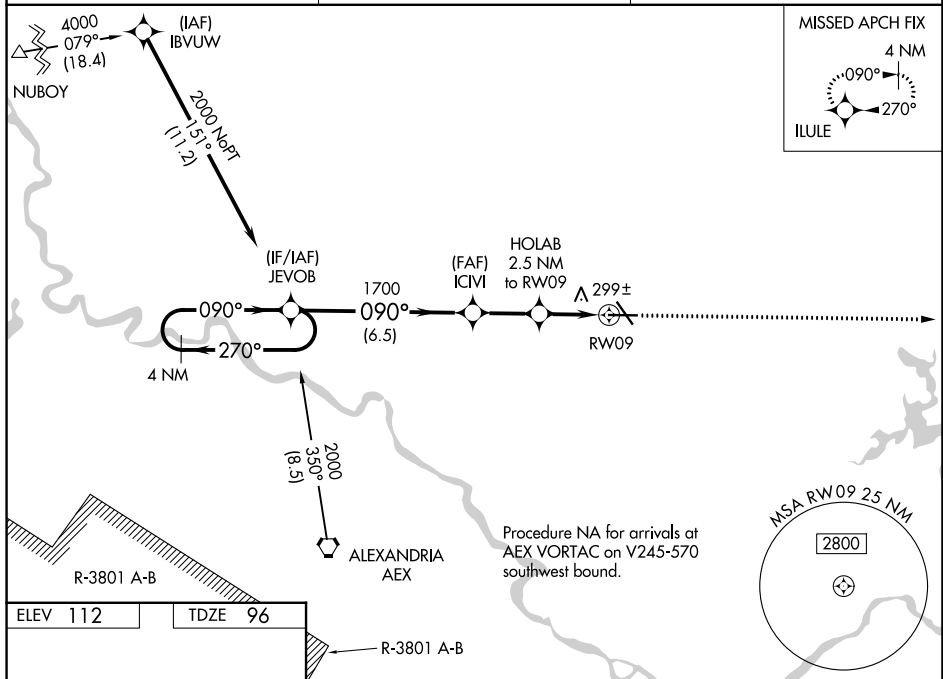

ELEV 112		TDZE 96
----------	--	---------



JEVOB

4 NM Holding Pattern

2000 ← 270° / → 090°

GP 3.00° TCH 53

ICVI 1700

HOLAB 2.5 NM to RW09

*940

*1.3 NM to RW09

RW09

Distances: 6.5 NM, 2.4 NM, 1.2 NM, 1.3 NM

*LNNAV only.

CATEGORY	A	B	C	D
LPV DA		296- ³ / ₄	200 (200- ³ / ₄)	
LNNAV/VNAV DA		609-1 ³ / ₈	513 (500-1 ³ / ₈)	
LNNAV MDA	560-1	464 (500-1)	560-1 ³ / ₈	464 (500-1 ³ / ₈)
CIRCLING	600-1	488 (500-1)	740-1 ³ / ₄ 628 (700-1 ³ / ₄)	760-2 648 (700-2)