

WAAS CH 53635 W18A	APP CRS 175°	Rwy Ldg 6080 TDZE 42 Apt Elev 46
--	------------------------	---

RNAV (GPS) RWY 18
CORPUS CHRISTI INTL (CRP)

RNP APCH - GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. For inop ALS, increase LPV Cat E visibility to $\frac{3}{4}$ SM, all LNAV/VNAV visibilities to $\frac{7}{8}$ SM, and LNAV Cat C, D, and E visibility to $1\frac{3}{4}$ SM.

MAISR



MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct SOLON and hold.

ATIS 126.8	CORPUS APP CON 120.9 348,725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269,15
----------------------	--	------------------------------------	--------------------------------

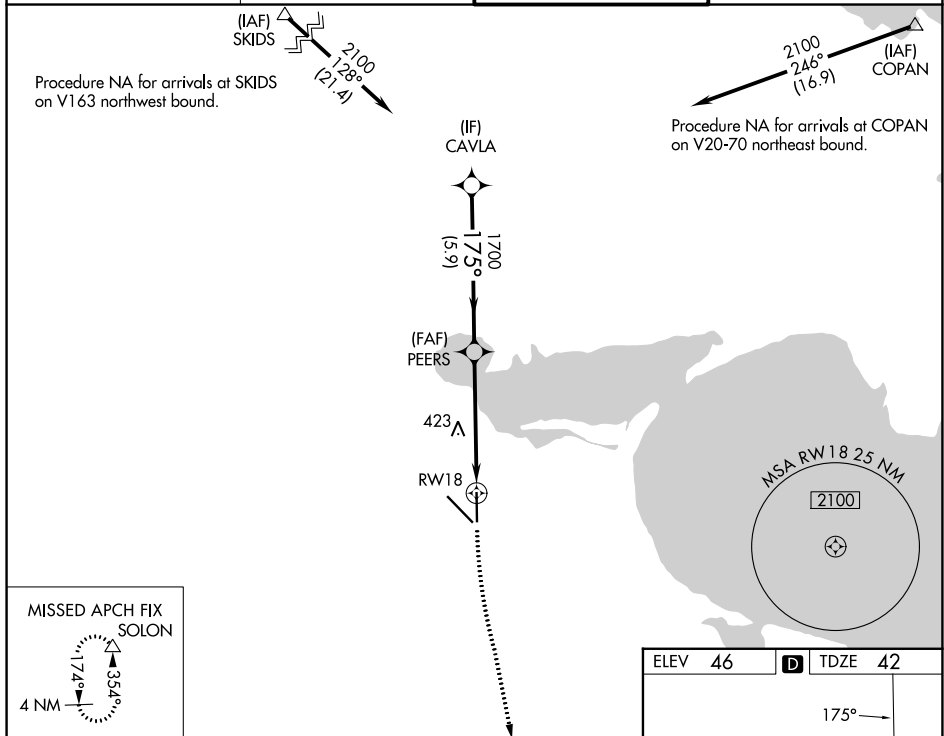

CAVLA

2100

175°

GP 3.00°
TCH 50

1700

PEERS

1700

1.8 NM to
RW18

RW18

5.9 NM

3.3 NM

1.8 NM

Legend:

- CAVLA (straight arrow)
- PEERS (curved arrow)
- SOLON (triangle)

