

WAAS CH 60914 W31A	APP CRS 312°	Rwy Ldg 7510 TDZE 43 Apt Elev 46
--	------------------------	---

RNAV (GPS) Y RWY 31
CORPUS CHRISTI INTL (CRP)



RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C.
Procedure NA when Cabaniss Fld traffic patterns active. For inop ALS, increase LPV Cat E visibility to ¾ SM, LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cat E visibility to 1¾ SM.

MALSRLAS

MISSED APPROACH:
Climb to 2000 direct
ATHIS and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15
----------------------	--	------------------------------------	--------------------------------

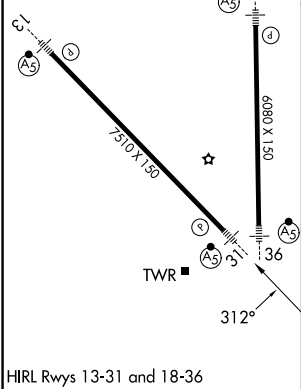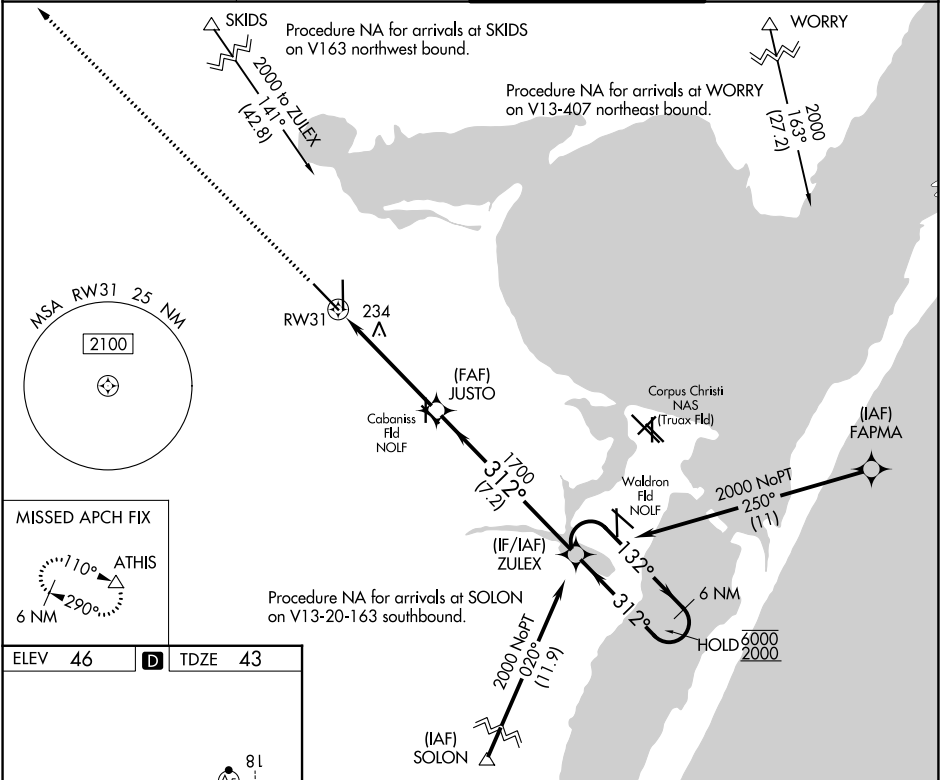

2000	ATHIS	JUSTO	ZULEX	6 NM Holding Pattern
1.3 NM to RW31	1.3 NM	3.8 NM	7.2 NM	GP 3.00° TCH 50
1700	1700	1700	1700	
132°	312°	312°	312°	6000 2000
CATEGORY				
A B C D E				
LPV DA 243-1½ 200 (200-½)				
LNAV/VNAV DA 356-5/8 313 (400-¾)				
LNAV MDA 500-½ 457 (500-½) 500-7/8 457 (500-7/8)				
CIRCLING 500-1 454 (500-1) 780-1 734 (800-1) 820-2¼ 774 (800-2¼) 820-2½ 774 (800-2½) 820-2¾ 774 (800-2¾)				

SC-3, 01 OCT 2026 to 29 OCT 2026

SC-3, 01 OCT 2026 to 29 OCT 2026