# RNAV (GPS) Y RWY 36

CORPUS CHRISTI INTL (CRP)

| WAAS | APP CRS | Rwy Ldg | 6080 |
|---|---|---|---|
| CH 69617 | 355° | TDZE | 40 |
| W36A | | Apt Elev | 46 |


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cat E visibility to RVR 6000.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2000 direct FEKEL and on track 304° to ATHIS and hold.

| ATIS | CORPUS APP CON | CORPUS TOWER | GND CON |
|---|---|---|---|
| 126.8 | 120.9 348.725 | 119.4 257.8 | 121.9 269.15 |

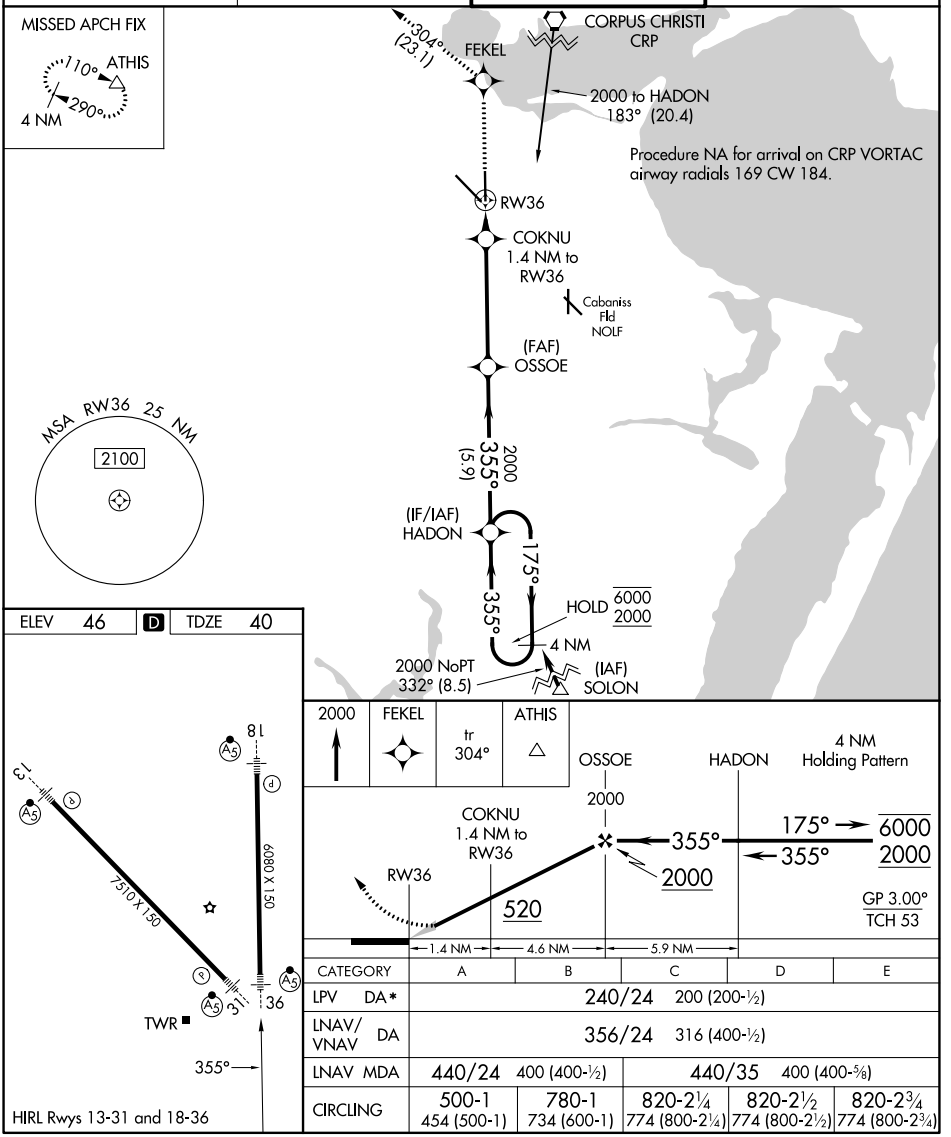








| CATEGORY | A | B | C | D | E |
|---|---|---|---|---|---|
| LPV DA* | 240/24 200 (200-½) | | | | |
| LNAV/VNAV DA | 356/24 316 (400-½) | | | | |
| LNAV MDA | 440/24 400 (400-½) | | 440/35 400 (400-⅝) | | |
| CIRCLING | 500-1 454 (500-1) | 780-1 734 (600-1) | 820-2¼ 774 (800-2¼) | 820-2½ 774 (800-2½) | 820-2¾ 774 (800-2¾) |



SC-3, 01 OCT 2026 to 29 OCT 2026
SC-3, 01 OCT 2026 to 29 OCT 2026