


LOC/DME I-PLQ	APP CRS	Rwy Ldg	8000
111.9	274°	TDZE	58
Chan 56		Apt Elev	83

ILS or LOC RWY 27


TALLAHASSEE INTL (TLH)

DME required.	ALSF-2	MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 on heading 092° and on SZW VORTAC R-140 to GACED INT/SZW 12.4 DME and hold, continue climb-in-hold to 4000.
For inop ALS, increase S-ILS 27 Cat E visibility to RVR 4000 and S-LOC 27 Cat E visibility to 2 SM.		

ATIS	TALLAHASSEE APP CON ★	TALLAHASSEE TOWER ★	GND CON	UNICOM
119.45 239.25	135.8 317.4	118.7 (CTAF) 257.8	121.9 348.6	123.075

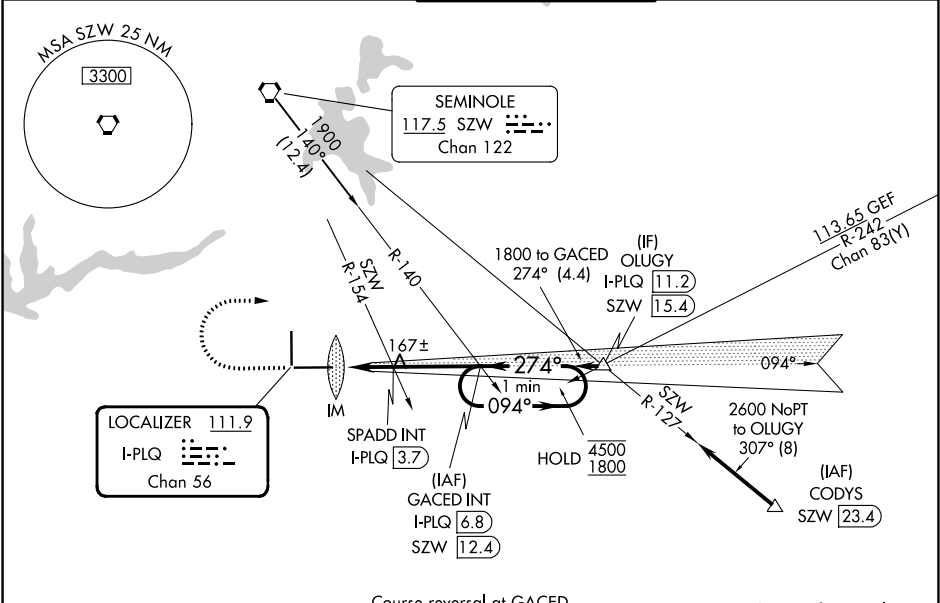

ELEV 83	TDZE 58
---------	---------



TDZL/RCLS Rwy 27	REIL Rwy 9 and 18	HIRL Rwy 9-27 and 18-36
FAF to MAP 5.3 NM		
Knots	60	90 120 150 180
Min:Sec	5:18	3:32 2:39 2:07 1:46