

LOC I-OCF	APP CRS	Rwy Ldg	6351
111.5	004°	TDZE	80
		Apt Elev	90

ILS or LOC RWY 36

OCALA INTL-JIM TAYLOR FLD (OCF)

DME required.



⚠ DME from OCF VORTAC. DME use requires simultaneous reception of I-OCF and OCF DME. Inop table does not apply to S-ILS 36 all Cats. For inop ALS, increase S-LOC 36 Cats A and B visibility to 1 SM.

MALSR



MISSED APPROACH: Climb to 2000 on OCF VORTAC R-355 to JODON/OCF VORTAC 16 DME and hold.

ATIS 128.125	JACKSONVILLE APP CON 118.6 251.15	OCALA TOWER ★ 119.25 (CTAF) 0	GND CON 121.4
-----------------	--------------------------------------	----------------------------------	------------------

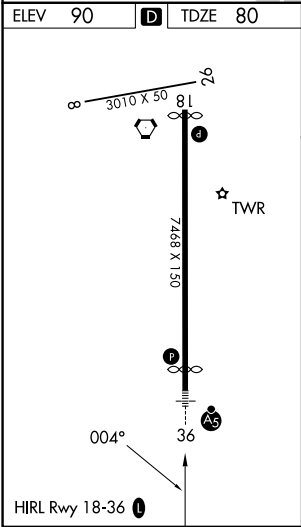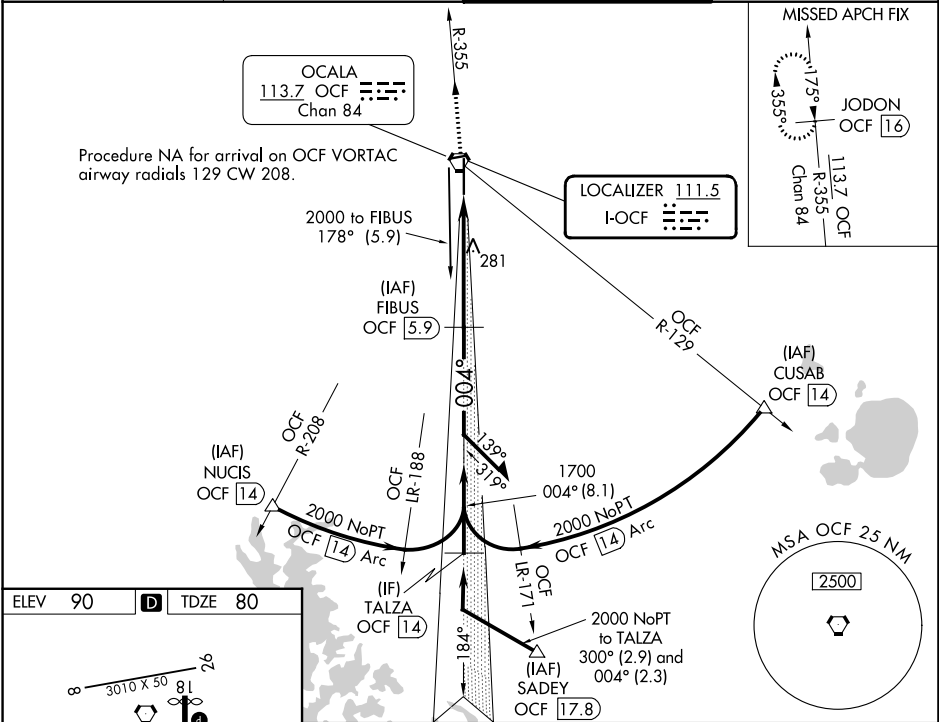

2000 ↑ OCF R-355		JODON OCF 16	FIBUS OCF 5.9		Remain within 10 NM
			1700	184°	
OCF 1.1		OCF 2.4	1700	004°	2000
1.3 NM		3.6 NM	1700	GS 3.00° TCH 50	
VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 45).					
CATEGORY	A		B	C	D
S-ILS 36			280-¾	200 (200-¾)	
S-LOC 36	540-¾ 460 (500-¾)		540-⅞ 460 (500-⅞)		
CIRCLING	600-1 510 (600-1)		760-1¾ 670 (700-1¾)	920-2¾ 830 (900-2¾)	

ILS or LOC RWY 36

SE-3, 01 OCT 2026 to 29 OCT 2026

SE-3, 01 OCT 2026 to 29 OCT 2026