RNAV (GPS) RWY 17

ASHEVILLE RGNL (AVL)

WAAS CH 93641 W17A	APP CRS 167°	Rwy Ldg 8002 / TDZE 2164 / Apt Elev 2164


RNP APCH.


Circling NA west of Rwy 17-35. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 2½ SM and increase LNAV Cats C/D visibility to 2 SM.


MALSR

MISSED APPROACH: Climb to 6200 direct AVEBE and hold, continue climb-in-hold to 6200.

ATIS	ASHEVILLE APP CON★	ASHEVILLE TOWER★	GND CON	UNICOM
120.2	124.65 351.8	121.1 (CTAF) L 257.8	121.9	122.95

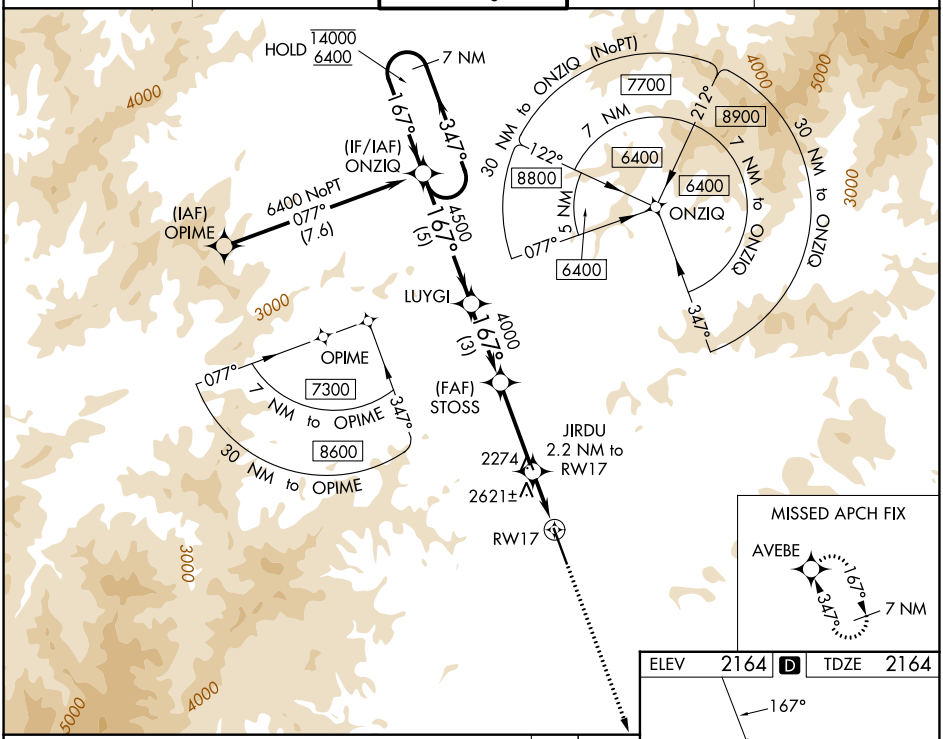

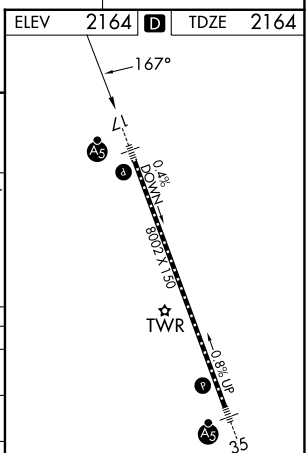

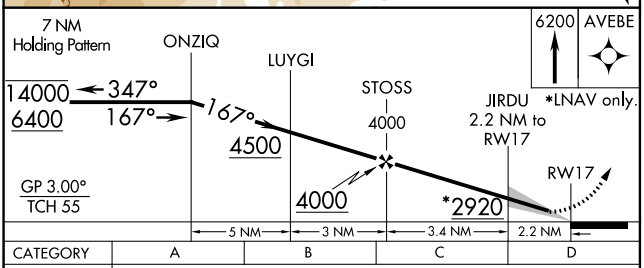

CATEGORY	A	B	C	D
LPV DA	2364-½	200 (200-½)		
LNAV/VNAV DA	2960-1¾	796 (800-1¾)		
LNAV MDA	2880-½	716 (800-½)	2880-1⅝	716 (800-1⅝)
CIRCLING	2880-1	716 (800-1)	3460-3 1296 (1300-3)	3720-3 1556 (1600-3)

TDZL/RCLS Rwy 35
HIRL Rwys 17-35 L
REIL Rwys 17 and 35

SE-2, 01 OCT 2026 to 29 OCT 2026
SE-2, 01 OCT 2026 to 29 OCT 2026