

WAAS CH 93702 W06A	APP CRS 057°	Rwy Ldg 7201 TDZE 2351 Apt Elev 2351
--	------------------------	---

RNAV (GPS) RWY 6


GENERAL WM J FOX AIRFIELD (WJF)

RNP APCH - GPS.


V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Baro-VNAV and VDP NA when using PMD altimeter setting. When local altimeter setting not received, use PMD altimeter setting and increase LPV DA to 2646 feet, increase LNAV/VNAV DA to 2694 feet, increase all MDAs 60 feet, and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 6000 direct
SISOY and on track 091° to ETHER and
hold.

ATIS 126.3	JOSHUA APP CON 126.1 290.3	FOX TOWER★ 118,525 (CTAF) 256.9	GND CON 121.7 256.9	UNICOM 122.95
----------------------	--------------------------------------	---	-------------------------------	-------------------------

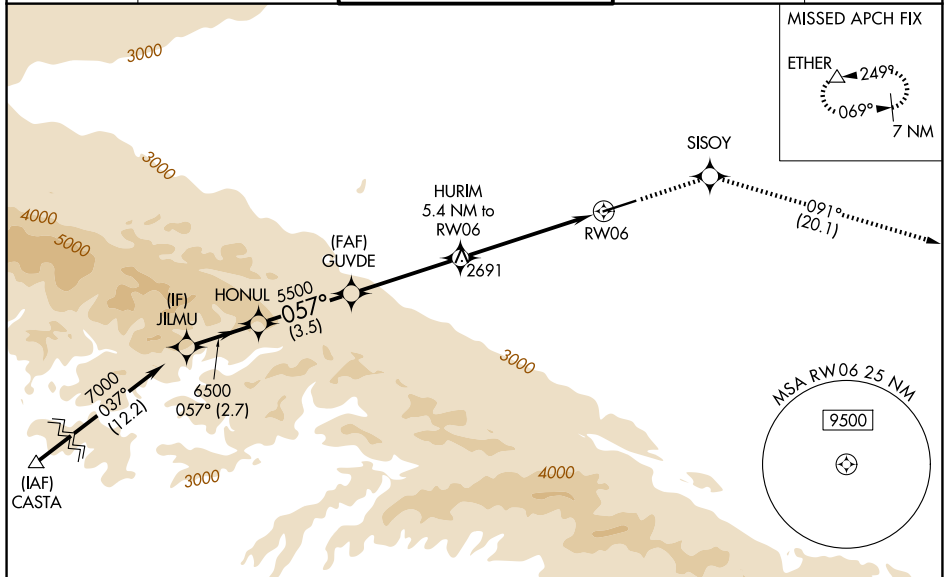

ELEV 2351		TDZE 2351
-----------	--	-----------

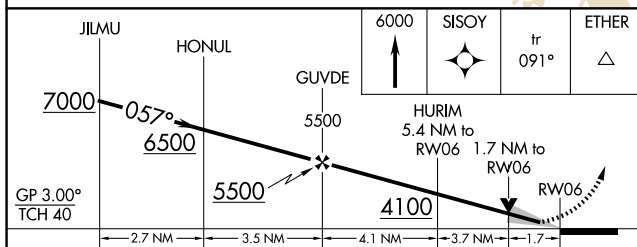

CATEGORY		A		B		C		D	
LPV	DA	2601-1		250 (300-1)					
LNNAV/ VNAV	DA	2649-1		298 (300-1)					
LNNAV	MDA	2940-1	589 (600-1)	2940-1 ³ / ₄		589 (600-1 ³ / ₄)			
CIRCLING		2940-1	589 (600-1)	3120-2 ¹ / ₄ 769 (800-2 ¹ / ₄)		3120-2 ¹ / ₂ 769 (800-2 ¹ / ₂)			

