

WAAS
CH **61041**
W23A

APP CRS
229°

Rwy Ldg
TDZE
Apt Elev
5200
15
15

RNAV (GPS) RWY 23

LAKE CHARLES RGNL (LCH)


RNP APCH - GPS.

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C.
Rwy 23 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 1700 direct WINUP and hold.

ATIS 118.75	LAKE CHARLES APP CON★ 119.35 353.75	LAKE CHARLES TOWER★ 120.7 (CTAF) 257.8	GND CON 121.8	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

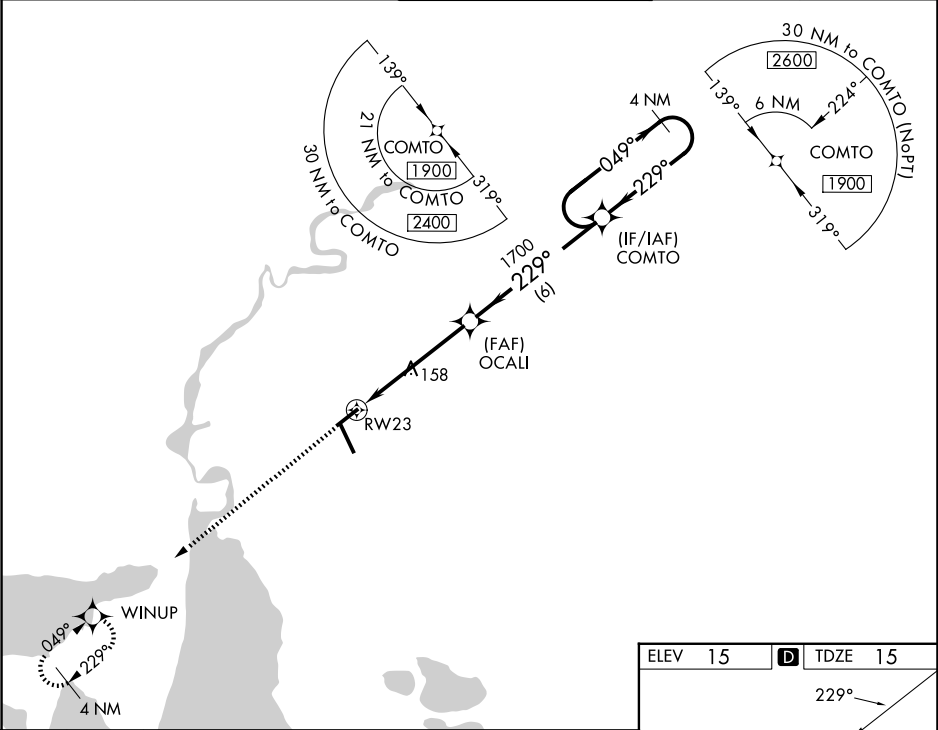

1700	WINUP	OCALI	COMTO	4 NM Holding Pattern
1.1 NM to RW23	1.1	4 NM	6 NM	
1700	229°	1700	049°	1900
			229°	
			GP 3.00°	TCH 47
CATEGORY	A	B	C	D
LPV DA		265-¾	250 (300-¾)	
LNAV/VNAV DA		301-⅞	286 (300-⅞)	
LNAV MDA	420-1	405 (500-1)	420-1⅛	405 (500-1⅛)
CIRCLING	440-1 425 (500-1)	480-1 465 (500-1)	580-1½ 565 (600-1½)	680-2 665 (700-2)

