

NA

Inop table does not apply to S-ILS 6 all Cats and S-LOC 6 Cats A and B. For inop ALS, increase S-LOC 6 Cat C/D visibility to 1 3/8 SM. Circling NA for Cat D northwest of Rwy 6-24.

MALSR


MISSED APPROACH: Climb to 3000 then climbing right turn to 5000 direct PSK VORTAC and hold, continue climb-in-hold to 5000.

AWOS-3  
127.375

ROANOKE APP CON  
126.0 339.8

ROANOKE CLNC DEL  
121.7

UNICOM  
122.7 (CTAF) 0

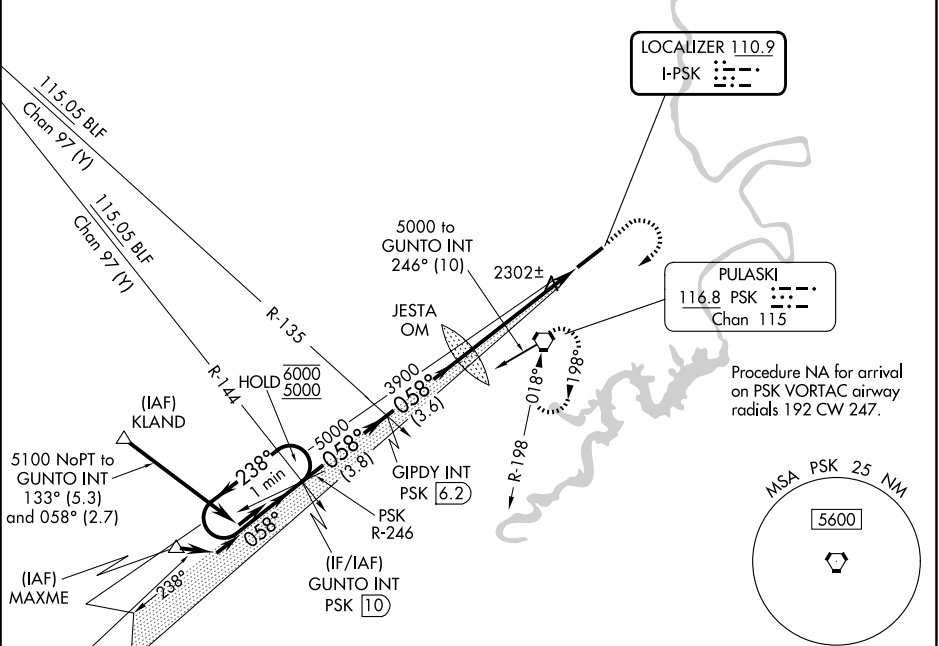

ELEV 2105

TDZE 2105

One Minute Holding Pattern

3000

5000

PSK

GUNTO INT PSK 10

GIPDY INT PSK 6.2

JESTA OM 3823

3900

GS 3.00° TCH 58

3.8 NM

3.6 NM

5.1 NM

| CATEGORY | A                     | B                     | C                     | D                             |
|----------|-----------------------|-----------------------|-----------------------|-------------------------------|
| S-ILS 6  |                       | 2305-1                | 200 (200-1)           |                               |
| S-LOC 6  |                       | 2560-1                | 455 (500-1)           |                               |
| CIRCLING | 2620-1<br>515 (600-1) | 2680-1<br>575 (600-1) | 2780-2<br>675 (700-2) | 2780-2 1/4<br>675 (700-2 1/4) |

HIRL Rwy 6-24 0

REIL Rwy 24 0

FAF to MAP 5.1 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 5:06 | 3:24 | 2:33 | 2:02 | 1:42 |